



P/N: GA710-SMFFSMFF-XXX

SMA 4 Hole Flange Female to SMA 4 Hole Flange Female Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 18GHz


**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 18GHz	1.60 to 18GHz	0.83
150	±3			1.0
200	±3			1.16
250	±3			1.33
300	±5			1.49
400	±5			1.82
500	±5			2.15


**Environmental Specifications**

RoHS Compliant  
Yes  
Operating Temperature Range  
-45 °C to +85 °C

**Test Report for Cable assembly**

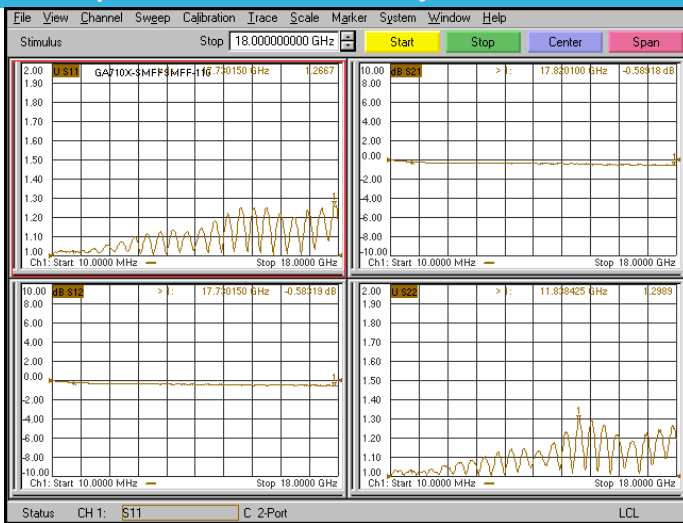

\*Note: Test Cable Assembly Length = 110 mm

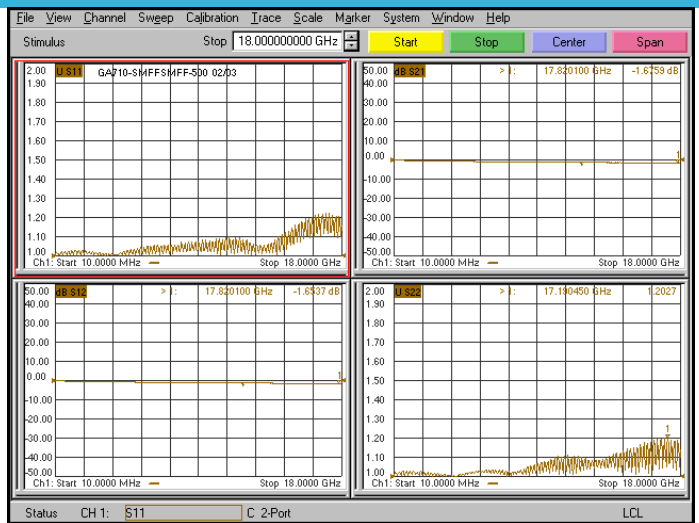

\*Note: Test Cable Assembly Length = 500 mm