


P/N: GA710-SMMSSMAM-XXX

**SMA Male to SSMA Male Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 18GHz**

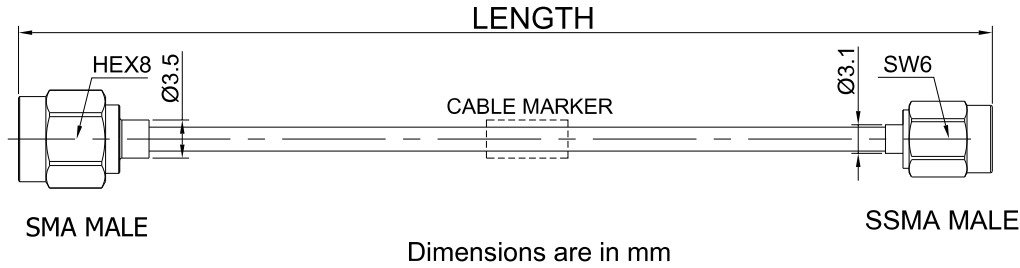

**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	SMA	SSMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50.0	50.0
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

**Cable Configuration**

Cable Type	.086" Semi-rigid Cable (Copper)
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Shield Layer 1 Material	Copper
Cable Diameter (mm)	2.2
Cable Color	Cooper
Minimum Bend Radius (mm)	6mm
Capacitance (pF/m)	95
Velocity of Propagation	70%
Shielding Effectiveness	<-120dB @ 1GHz



P/N: GA710-SMMSSMAM-XXX

SMA Male to SSMA Male Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 18GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 18GHz	1.35 to 18GHz	0.83
150	±3			1.0
200	±3			1.16
250	±3			1.33
300	±5			1.49
400	±5			1.82
500	±5			2.15

**Environmental Specifications**


RoHS Compliant

Yes


Operating Temperature Range

-45 °C to +85 °C

**Test Report for Cable assembly**

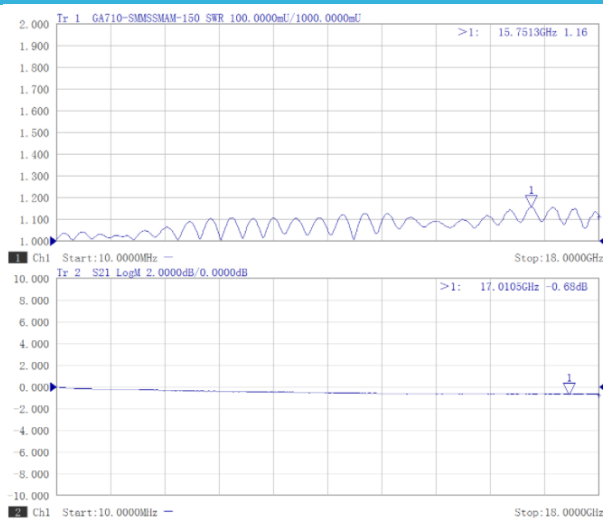

\*Note: Test Cable Assembly Length = 150 mm

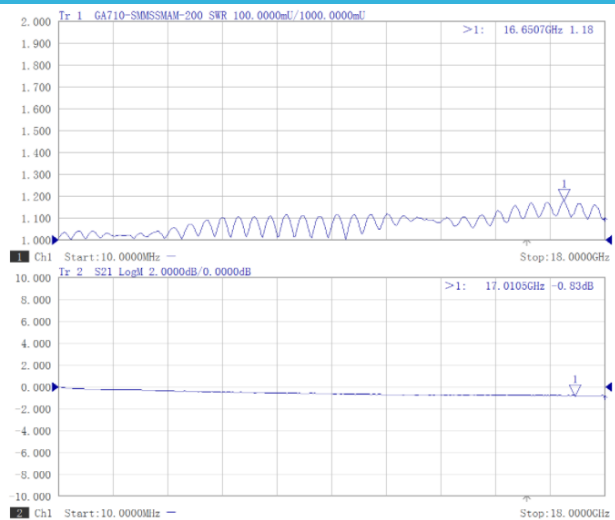

\*Note: Test Cable Assembly Length = 200 mm