




P/N: FR711-185FFG3PF-XXX

1.85mm 4 Hole Flange Female to G3PO(SMPS) Female Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 67GHz

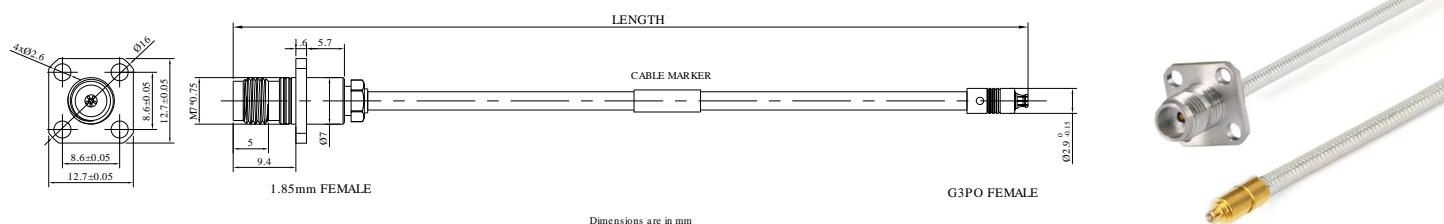


Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	4 Hole Flange	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

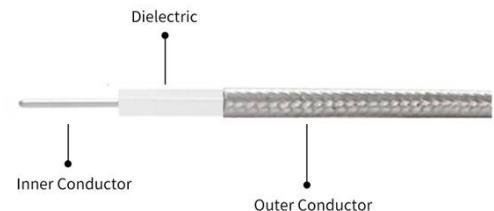



P/N: FR711-185FFG3PF-XXX

1.85mm 4 Hole Flange Female to G3PO(SMPS) Female Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 67GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC - 50GHz	14dB to 40GHz	1.32 to 40GHz
150	± 3			1.63 to 40GHz
200	± 3			1.94 to 40GHz
250	± 3			2.25 to 40GHz
300	± 5			2.56 to 40GHz
400	± 5			3.18 to 40GHz
500	± 5			3.82 to 40GHz

Environmental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-40°C to +125°C

Test Report for Cable assembly

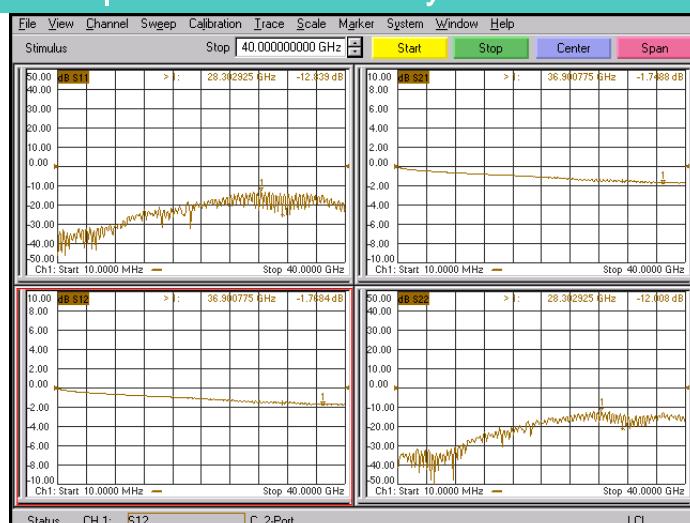

*Note: Test Cable Assembly Length = 200 mm

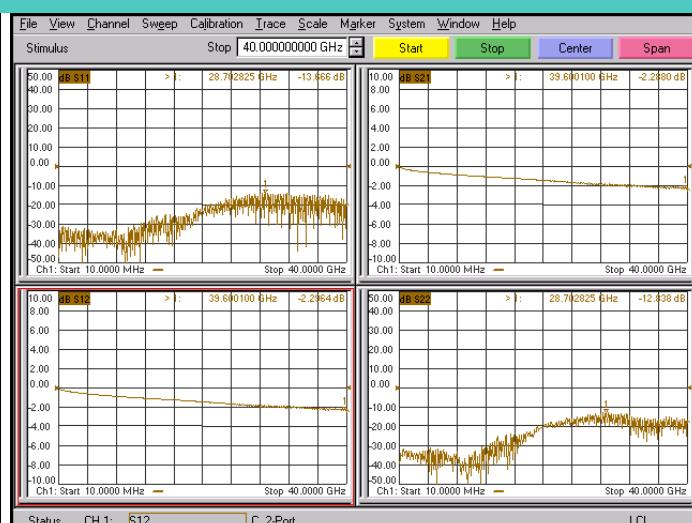

*Note: Test Cable Assembly Length = 300 mm