


P/N: GA711-185MMMPXM-XXX

**1.85mm Male to MMPX Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 65GHz**

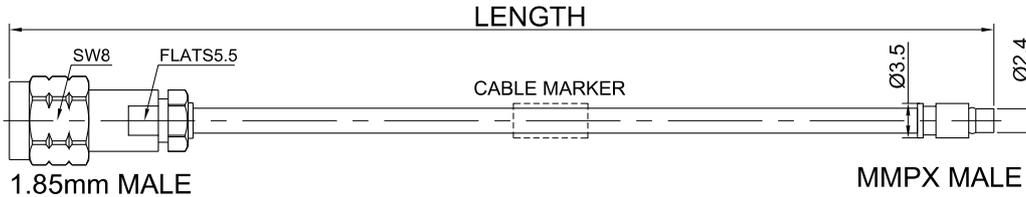


Dimensions are in mm

### Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	MMPX
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Brass
Connector Body Plating	Passivated	Gold

### Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

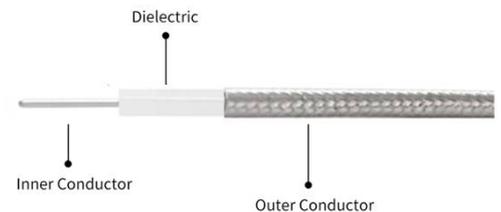

P/N: GA711-185MMMPXM-XXX

1.85mm Male to MMPX Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket  
| DC - 65GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 65GHz	12dB	1.70
150	±3			2.20
200	±3			2.70
250	±3			3.20
300	±5			3.70
400	±5			4.70
500	±5			5.70

**Environmental Specifications**

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C