


P/N: FR711-24MMMPXM-XXX

**2.4mm Male to MMPX Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 50GHz**



Dimensions are in mm

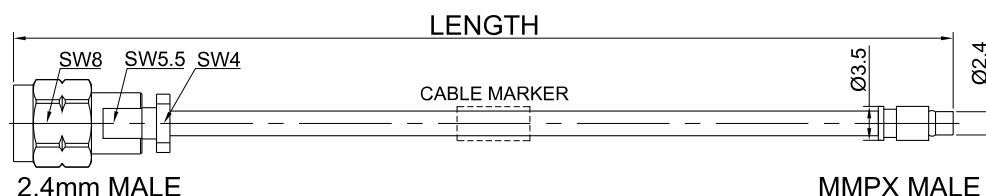


## Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	MMPX
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Brass
Connector Body Plating	Passivated	Gold

## Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

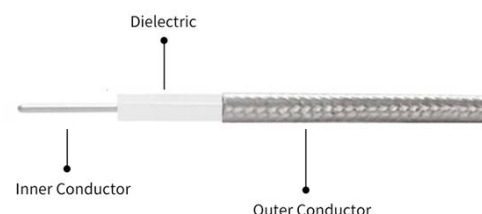

P/N: FR711-24MMMPXM-XXX

2.4mm Male to MMPX Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 50GHz

## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC - 40GHz	14dB to 40GHz	1.32 to 40GHz
150	$\pm 3$			1.63 to 40GHz
200	$\pm 3$			1.94 to 40GHz
250	$\pm 3$			2.25 to 40GHz
300	$\pm 5$			2.56 to 40GHz
400	$\pm 5$			3.18 to 40GHz
500	$\pm 5$			3.82 to 40GHz

## Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C