


2.92mm Male to MMPX Male Cable Using .086" Semi-flexible Coax, P/N: FR711-292MMMPXM-XXX DC - 40GHz

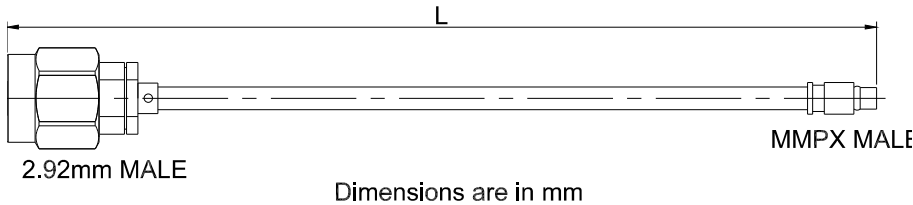

Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	MMPX
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Brass
Connector Body Plating	Passivated	Gold

2.92mm Male to MMPX Male Cable Using .086" Semi-flexible Coax, P/N: FR711-292MMMPXM-XXX
DC - 40GHz

Electrical Data

Electrical Specifications for Different Length		
Length (mm)	Length Tolerance (mm)	Insertion Loss ≤ (dB)
100	±3	1.32 to 40GHz
150	±3	1.63 to 40GHz
200	±3	1.94 to 40GHz
250	±3	2.25 to 40GHz
300	±5	2.56 to 40GHz
400	±5	3.18 to 40GHz
500	±5	3.82 to 40GHz
800	±10	5.66 to 40GHz
1000	±10	6.92 to 40GHz

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C