


P/N: FR711-SMM2SMFF-XXX

## SMA Male Removable Nut to SMA 4 Hole Flange Female Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz

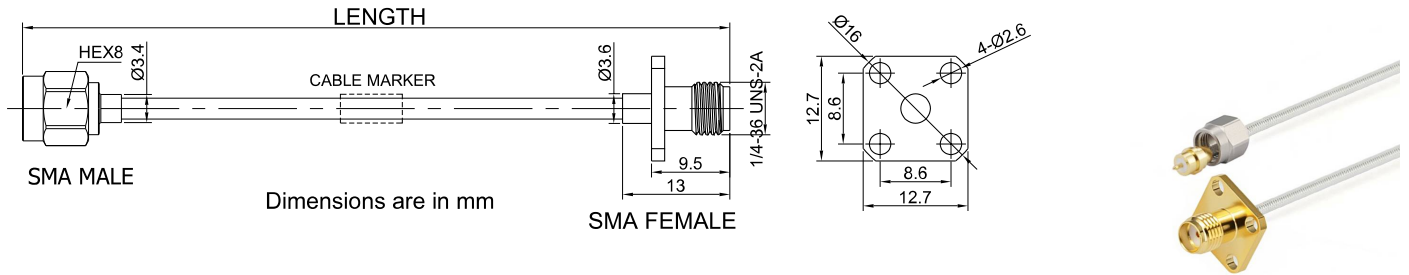


### Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method		4 Hole Flange
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Brass
Connector Body Plating	Passivated	Gold

### Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

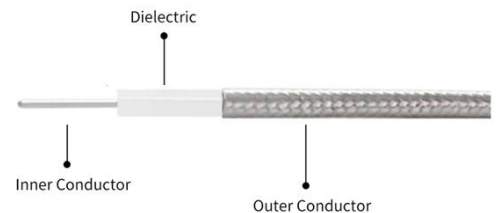


## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC - 18GHz	$\leq 1.35$	0.83
150	$\pm 3$			0.99
200	$\pm 3$			1.16
250	$\pm 3$			1.34
300	$\pm 5$			1.49
400	$\pm 5$			1.82
500	$\pm 5$			2.15


## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

## Test Report for Cable assembly

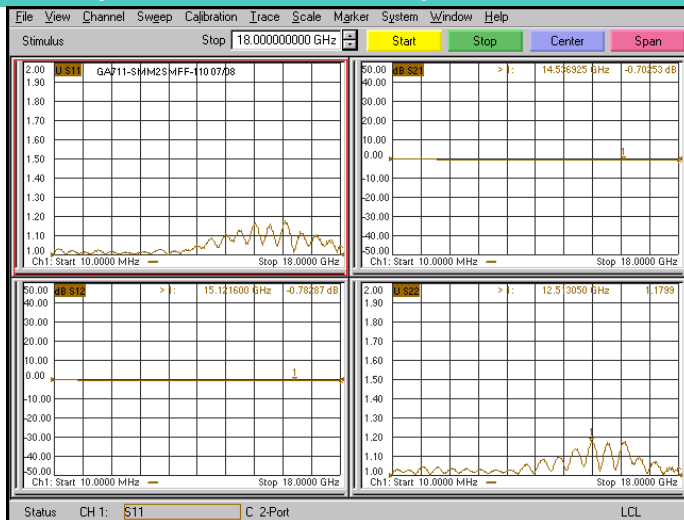

\*Note: Test Cable Assembly Length = 110 mm

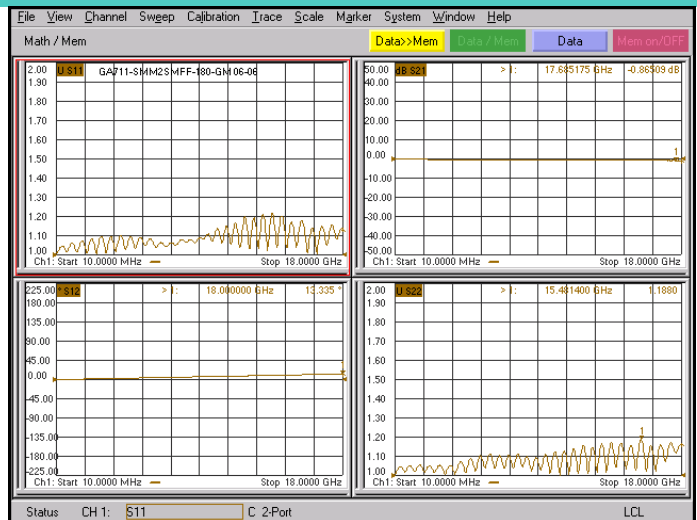

\*Note: Test Cable Assembly Length = 180 mm

## Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01