


P/N: GA711-SMMGPF-XXX

SMA Male to GPO (SMP) Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz



Dimensions are in mm

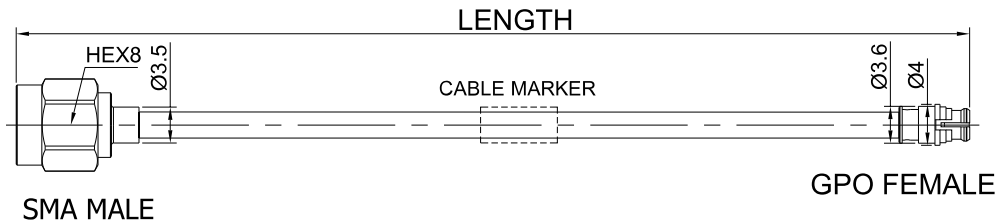


Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	CuBe
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

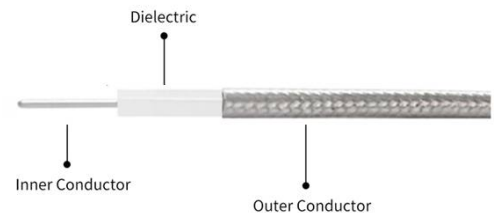

P/N: GA711-SMMGPF-XXX

SMA Male to GPO (SMP) Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 18GHz	≤ 1.35	0.83
150	±3			0.99
200	±3			1.16
250	±3			1.34
300	±5			1.49
400	±5			1.82
500	±5			2.15


Environmental Specifications

RoHS Compliant
Yes
Operating Temperature Range
-40°C to +125°C

Test Report for Cable assembly

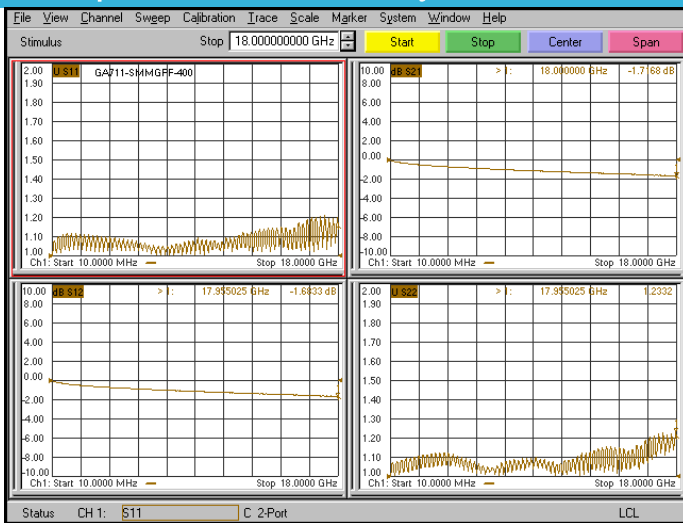

*Note: Test Cable Assembly Length = 400 mm

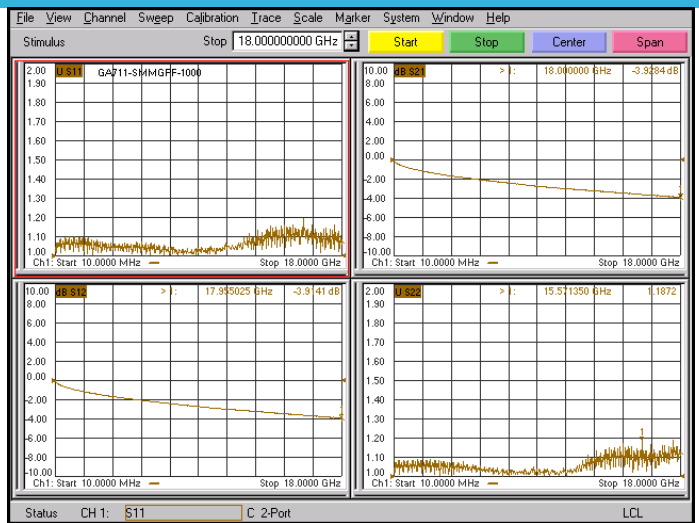

*Note: Test Cable Assembly Length = 1000 mm