


P/N: FR711-SMMSMWM1-XXX

## SMA Male to SMA Right Angle Male Cable Assembly | .086" Semi-Flexible Coax Cable Without FEP Jacket | DC - 18GHz

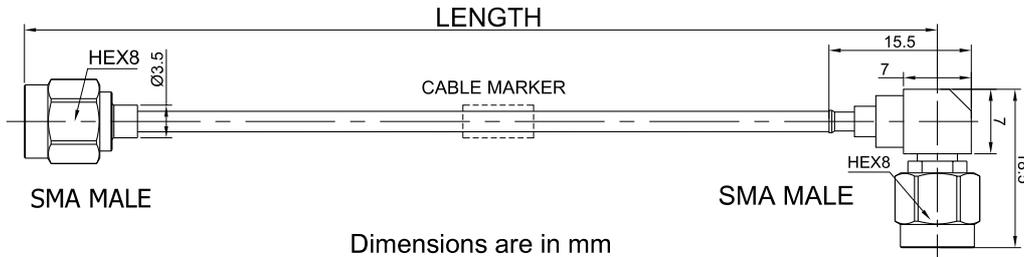


### Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Right Angle
Connector Body Material	Stainless Steel	Brass
Connector Body Plating	Passivated	Gold

### Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Number of Shields	1
Shield Layer 1 Material	Tin Plated Copper
Cable Diameter (mm)	2.2
Cable Color	Silver
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

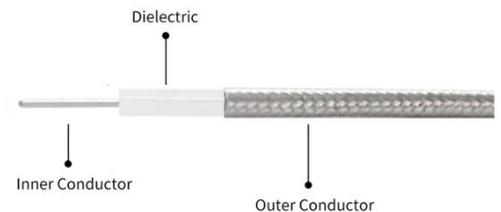

## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC - 18GHz	$\leq 1.35$	0.83
150	$\pm 3$			0.99
200	$\pm 3$			1.16
250	$\pm 3$			1.34
300	$\pm 5$			1.49
400	$\pm 5$			1.82
500	$\pm 5$			2.15

## Environmental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40°C to +125°C

## Test Report for Cable assembly



\*Note: Test Cable Assembly Length = 130 mm

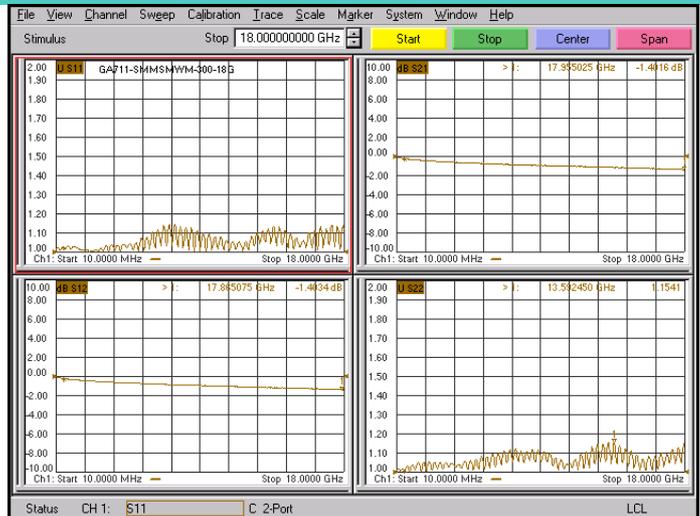

\*Note: Test Cable Assembly Length = 300 mm

## Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01