

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC-18GHz	≤ 1.3	0.83
150	± 3			0.99
200	± 3			1.16
250	± 3			1.34
300	± 5			1.49
400	± 5			1.82
500	± 5			2.15

Environmental Specifications


RoHS Compliant

Yes


Operating Temperature Range

-40°C to +125°C

Test Report for Cable assembly

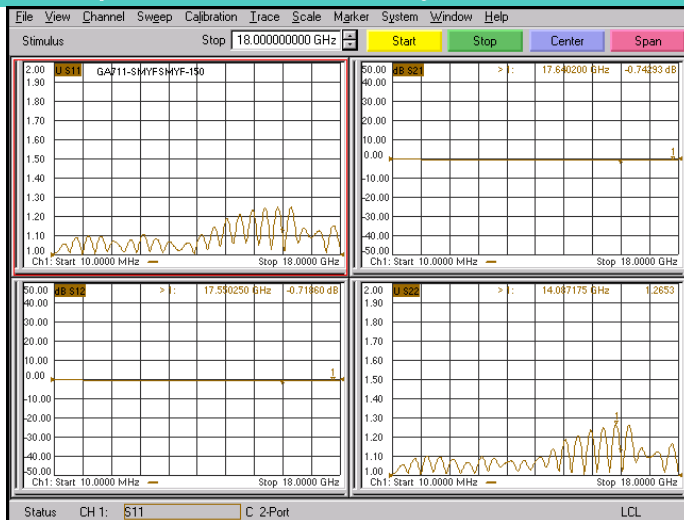

*Note: Test Cable Assembly Length = 150 mm

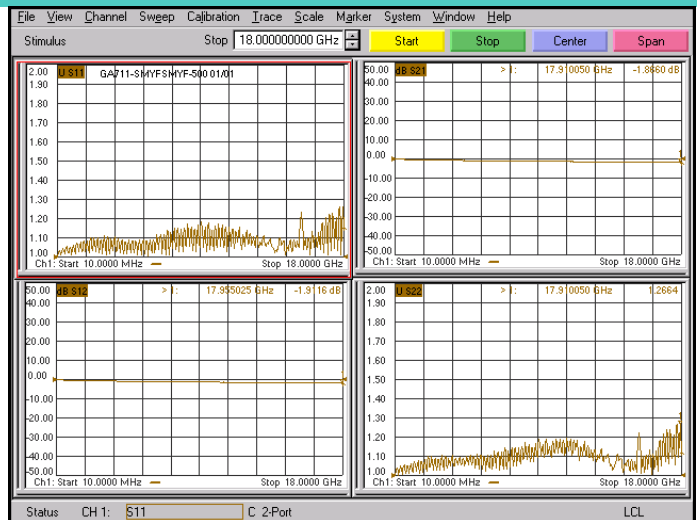

*Note: Test Cable Assembly Length = 500 mm

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01