




## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC-18GHz	$\leq 1.3$	0.83
150	$\pm 3$			0.99
200	$\pm 3$			1.16
250	$\pm 3$			1.34
300	$\pm 5$			1.49
400	$\pm 5$			1.82
500	$\pm 5$			2.15


## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

## Test Report for Cable assembly

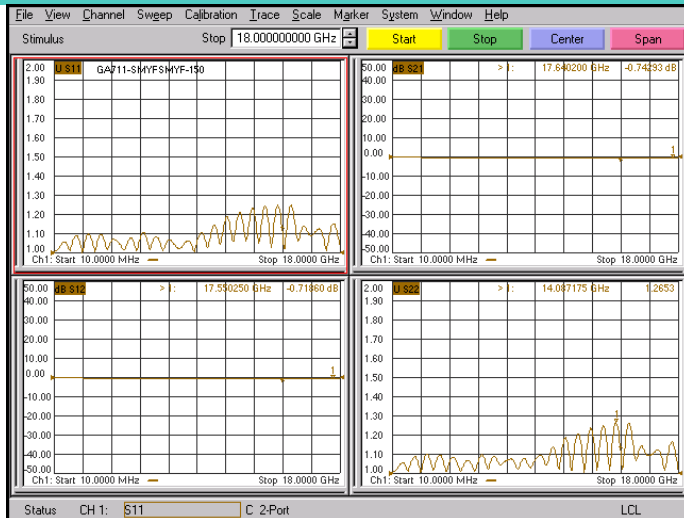

\*Note: Test Cable Assembly Length = 150 mm

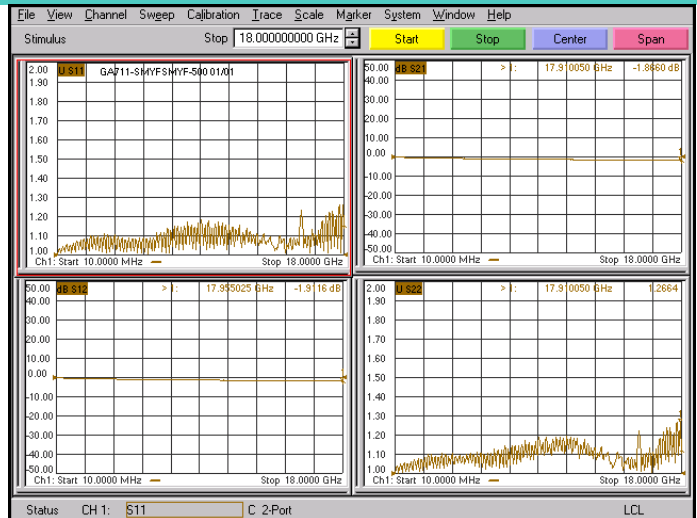

\*Note: Test Cable Assembly Length = 500 mm

## Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01