
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GA712-24FG3PF-XXX

2.4mm Female to G3PO(SMPS) Female Cable Assembly | 086" Semi-Flexible Coax Cable with FEP Jacket | DC - 50GHz

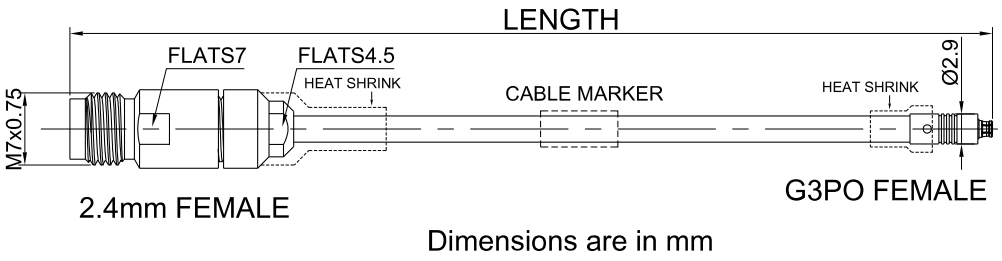

Dimensions are in mm




Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	G3PO(SMPS)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	CuBe
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Shield Layer 1 Material	Tin Plated Copper
Jacket Material	FEP
Cable Diameter (mm)	2.54
Cable Color	Blue
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

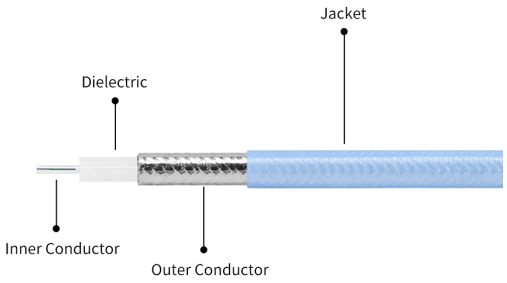

Gwave Technology Inc

(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GA712-24FG3PF-XXX

2.4mm Female to G3PO(SMPS) Female Cable Assembly | 086" Semi-Flexible Coax Cable with FEP Jacket | DC - 50GHz

Electrical Data

Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 50GHz	12 dB to 50GHz	1.40 to 50GHz
150	±3			1.75 to 50GHz
200	±3			2.10 to 50GHz
250	±3			2.45 to 50GHz
300	±5			2.80 to 50GHz
400	±5			3.45 to 50GHz
500	±5			4.10 to 50GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C