


P/N: GA712-24FGPPWF-XXX

**2.4mm Female to GPPO(Mini-SMP) Right Angle Female Cable Assembly | .086" Semi-Flexible Coax Cable with FEP Jacket | DC - 50GHz**

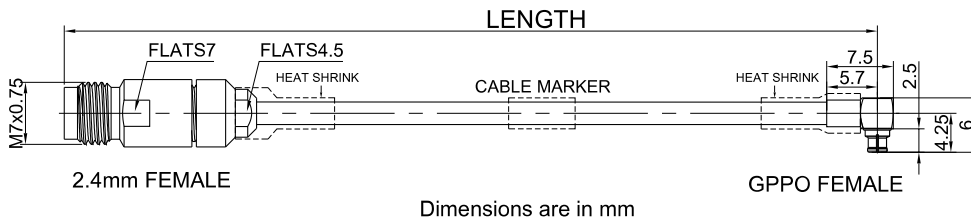

**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	2.4mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Right Angle
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

**Cable Configuration**

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Shield Layer 1 Material	Tin Plated Copper
Jacket Material	FEP
Cable Diameter (mm)	2.54
Cable Color	Blue
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

P/N: GA712-24FGPPWF-XXX

2.4mm Female to GPPO(Mini-SMP) Right Angle Female Cable Assembly | 086" Semi-Flexible Coax Cable with FEP Jacket | DC - 50GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 50GHz	10dB to 50GHz	1.40 to 50GHz
150	±3			1.75 to 50GHz
200	±3			2.10 to 50GHz
250	±3			2.45 to 50GHz
300	±5			2.80 to 50GHz
400	±5			3.45 to 50GHz
500	±5			4.10 to 50GHz

**Environmental Specifications**


RoHS Compliant

Yes

Operating Temperature Range

-40°C to +125°C

**Test Report for Cable assembly**

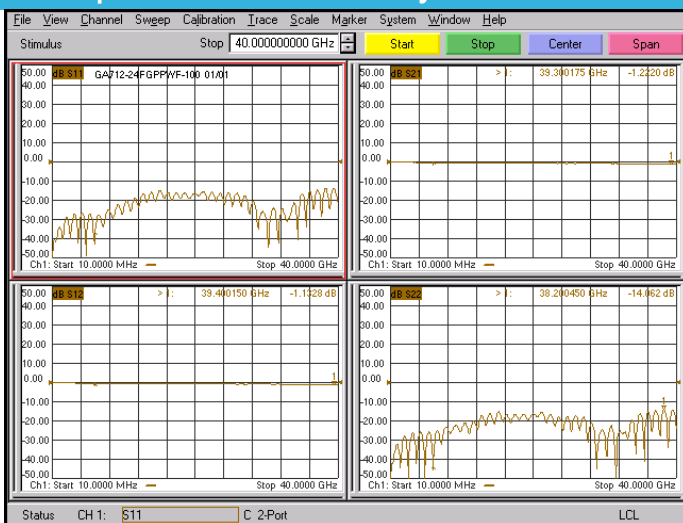

\*Note: Test Cable Assembly Length = 100 mm