



P/N: FR712-292FFGPPF-XXX

2.92mm 4 Hole Flange Female to GPPO(Mini-SMP) Female Cable Assembly | 086" Semi-Flexible Coax Cable with FEP Jacket | DC - 40GHz


## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	14dB	1.32
150	±3			1.63
200	±3			1.94
250	±3			2.25
300	±5			2.56
400	±5			3.21
500	±5			3.82


## Environmental Specifications

RoHS Compliant Yes  
 Operating Temperature Range -40°C to +125°C

## Test Report for Cable assembly

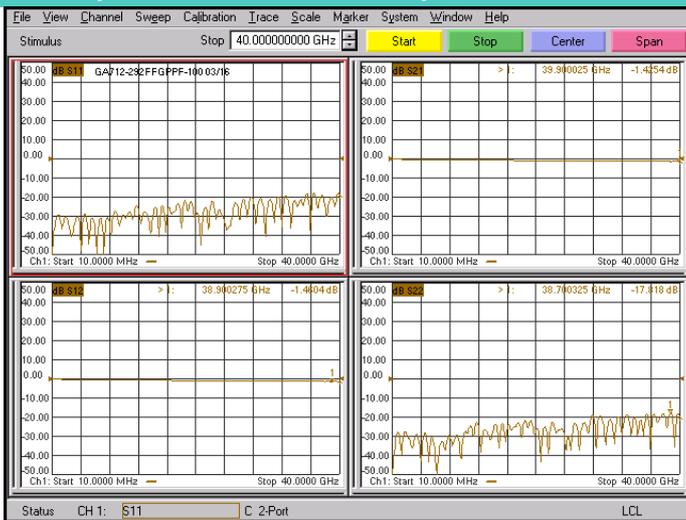

\*Note: Test Cable Assembly Length = 100 mm

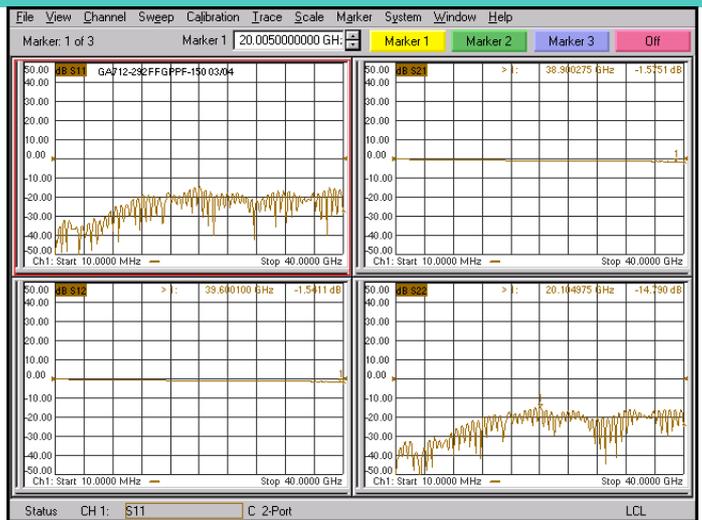

\*Note: Test Cable Assembly Length = 150 mm