


P/N: GA712-292WMGPWF-XXX

2.92mm Right Angle Male to GPO(SMP) Right Angle Female Cable Assembly | .086" Semi-Flexible Coax Cable With FEP Jacket | DC - 30GHz

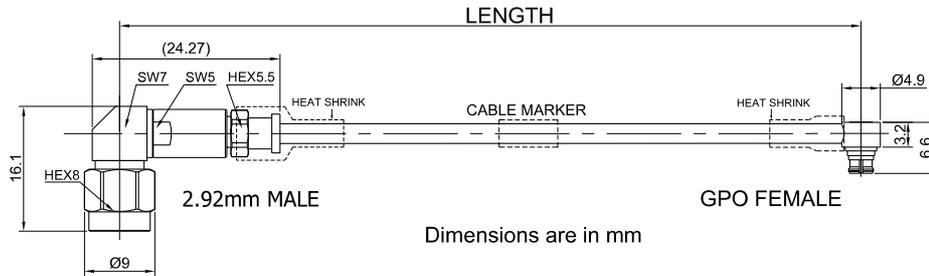


Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.92mm	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

Cable Configuration

Cable Type	.086" Semi-Flexible cable
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	Solid extruded PTFE
Shield Layer 1 Material	Tin Plated Copper
Jacket Material	FEP
Cable Diameter (mm)	2.54
Cable Color	Blue
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	< -110dB @ 1GHz

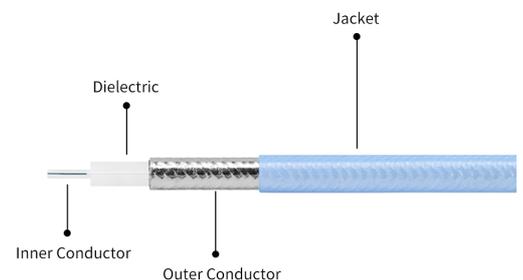

P/N: GA712-292WMGPWF-XXX

2.92mm Right Angle Male to GPO(SMP) Right Angle Female Cable Assembly | .086" Semi-Flexible Coax Cable With FEP Jacket | DC - 30GHz

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC-30GHz	12 dB	1.32
150	±3			1.63
200	±3			1.94
250	±3			2.25
300	±5			2.56
400	±5			3.21
500	±5			3.82

Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-40°C to +125°C