

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC-6GHz	1.3	0.59
200	± 3			0.79
300	± 5			0.99
400	± 5			1.19
500	± 5	DC-6GHz		1.38

Environmental Specifications


RoHS Compliant

Yes

Operating Temperature Range

-40°C to +125°C

Test Report for Cable assembly

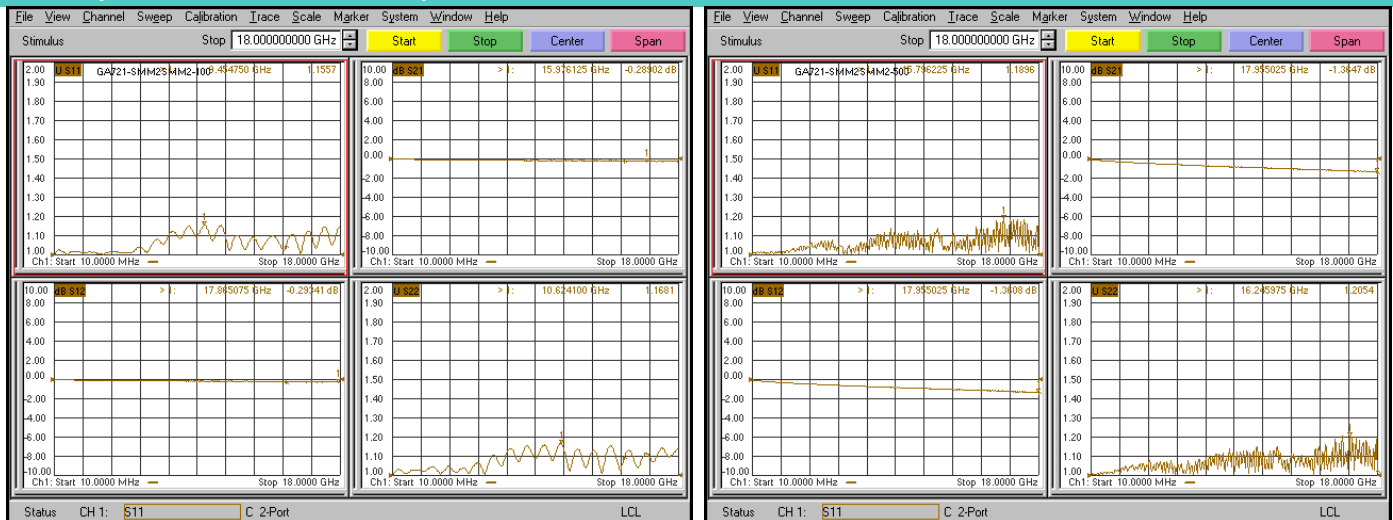

Revision History

Version	Description	Prepared By	Approved By	Date