


P/N: GA721-SMWSMWM-XXX-6G

**SMA Right Angle Male to SMA Right Angle Male Cable Assembly | .141" Semi-flexible Cable without Jacket □ DC-6GHz**

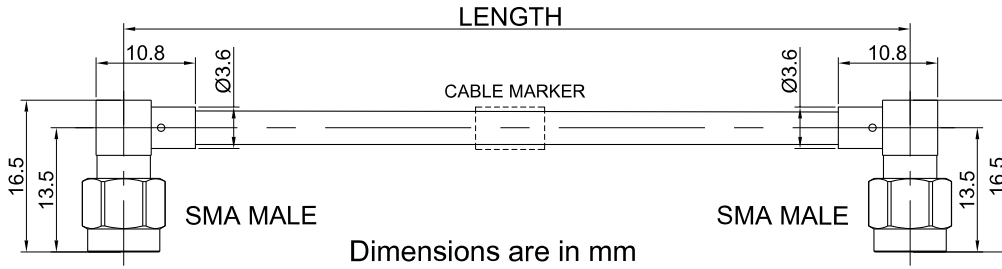

**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**Cable Configuration**

Cable Type	Semi-flexible
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Covered Steel (SCCS)
Dielectric Material	PTFE
Number of Shields	1
Shield Layer 1 Material	Tin-soaked, Tin Plated Copper (T)
Cable Diameter (mm)	3.6
Cable Color	Silver
Minimum Bend Radius (mm)	10
Capacitance (pF/m)	94
Velocity of Propagation	71%
Shielding Effectiveness	>100dB



P/N: GA721-SMWMSMWM-XXX-6G

SMA Right Angle Male to SMA Right Angle Male Cable Assembly | .141" Semi-flexible Cable without Jacket | DC-6GHz


**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC-6GHz	1.35	0.3
200	±3			0.41
300	±5			0.52
400	±5			0.63
500	±5	DC-6GHz		0.74


**Environmental Specifications**

RoHS Compliant  
Yes  
Operating Temperature Range  
-40°C to +125°C

**Test Report for Cable assembly**

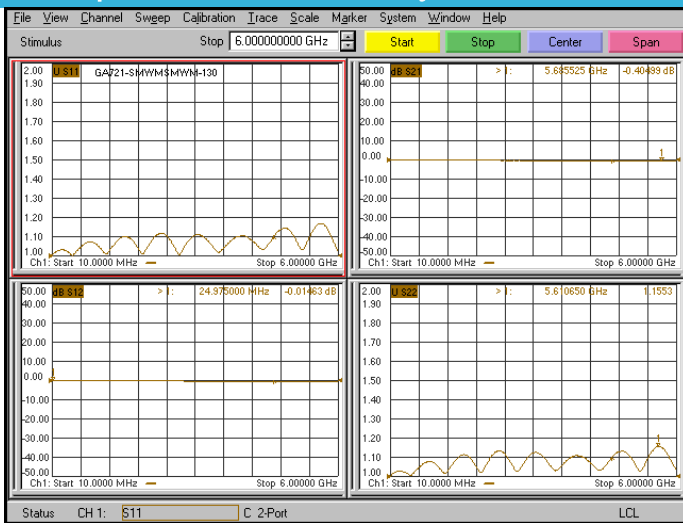

\*Note: Test Cable Assembly Length = 130 mm

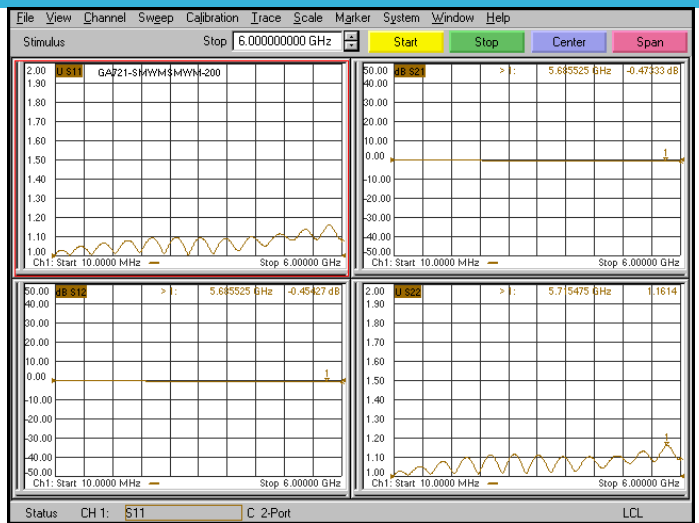

\*Note: Test Cable Assembly Length = 200 mm