

N Male SMA Male Cable Using 205A Series Flexible Coax With FEP Jacket, DC-18GHz P/N: [FRA3-NMSMM-XXX](#)




Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Stainless Steel
Connector Body Plating	Passivated	Passivated

N Male SMA Male Cable Using 205A Series Flexible Coax With FEP P/N: FRA3-NMSMM-XXX Jacket, DC-18GHz

Electrical Data

Test Report for Cable assembly

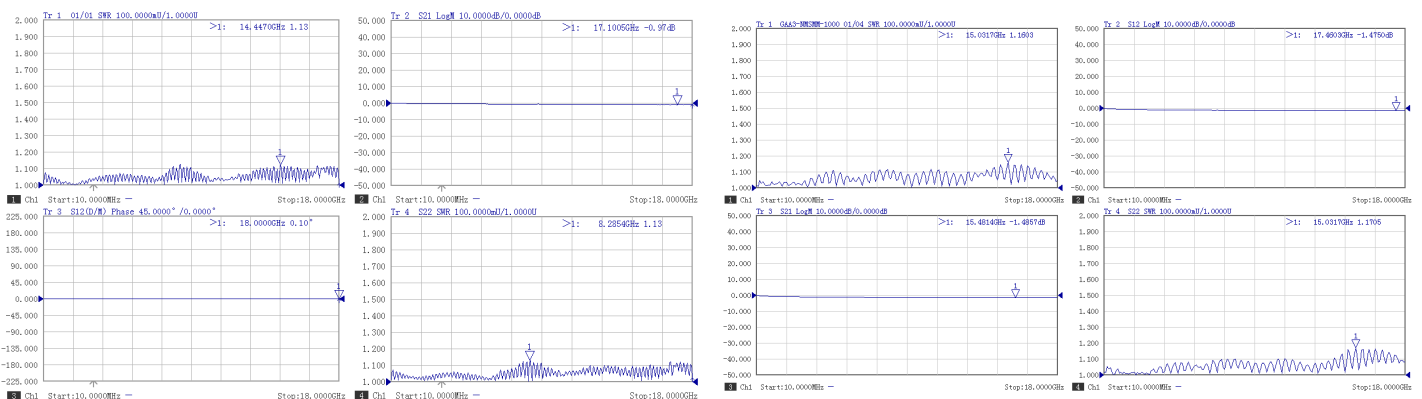

*Note: Test Cable Assembly Length = 600 mm

*Note: Test Cable Assembly Length = 1000 mm

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A