


P/N: FRF71-185FGPPF-XXX

## 1.85mm Female to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 65GHz



Dimensions are in mm

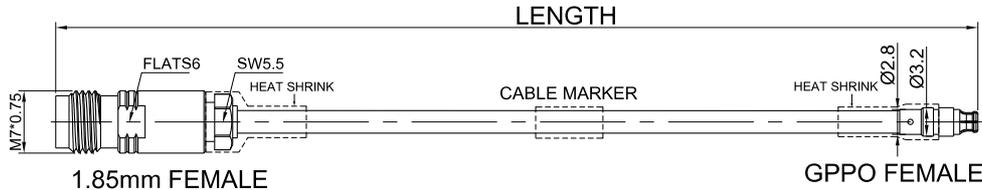


### Connectors Configuration

	Connector 1	Connector 2
Connector Series	1.85mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

### Cable Configuration

Cable Type	RG-405SS
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.64
Cable Color	Turquoise
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	< -100dB @ 1GHz

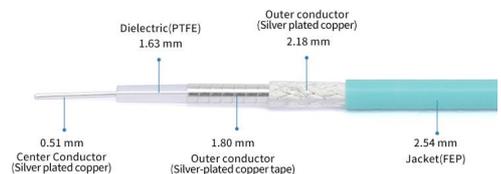

P/N: FRF71-185FGPPF-XXX

1.85mm Female to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 65GHz

## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 65GHz	12dB to 65GHz	1.70 to 65GHz
200	±3			2.70 to 65GHz
300	±5			3.70 to 65GHz
400	±5			4.70 to 65GHz
500	±5			5.70 to 65GHz
600	±5			6.70 to 65GHz
800	±10			7.70 to 65GHz
1000	±10			9.70 to 65GHz
1500	±15			14.70 to 65GHz
2000	±20			19.70 to 65GHz

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45°C to +125°C