


**P/N: GAF71-185MGPPF-XXX**

**1.85mm Male to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 65GHz**



Dimensions are in mm

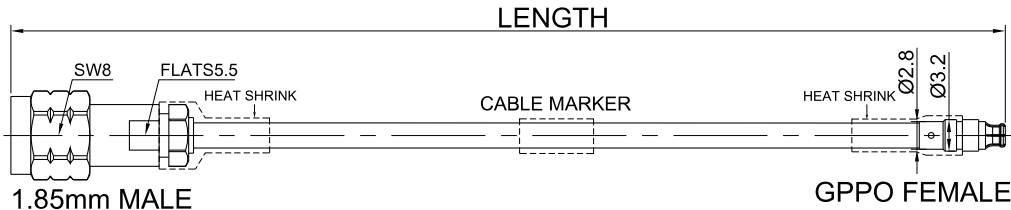


**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	1.85mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

**Cable Configuration**

Cable Type	RG-405SS
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.64
Cable Color	Turquoise
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	> 100dB @ 1GHz

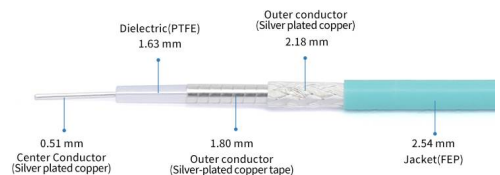

P/N: GAF71-185MGPPF-XXX

1.85mm Male to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 65GHz

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 65GHz	12 dB to 65 GHz	1.70 to 65GHz
200	±3			2.70 to 65GHz
300	±5			3.70 to 65GHz
400	±5			4.70 to 65GHz
500	±5			5.70 to 65GHz
600	±5			6.70 to 65GHz
800	±10			5.70 to 65GHz
1000	±10			9.70 to 65GHz
1500	±15			9.70 to 65GHz
2000	±20			19.70 to 65GHz

**Environmental Specifications**


RoHS Compliant

Yes


Operating Temperature Range

-45°C to +125°C

**Test Report for Cable assembly**

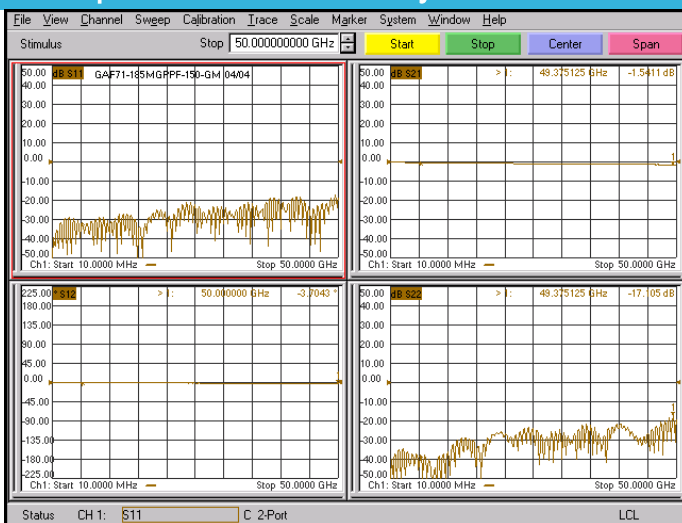

\*Note: Test Cable Assembly Length = 150 mm

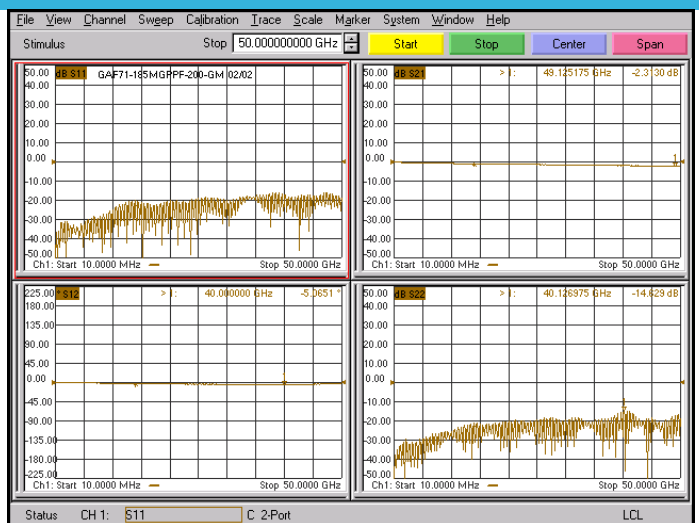

\*Note: Test Cable Assembly Length = 200 mm