


**P/N: GAF71-24FFGPPF-XXX**

**2.4mm 4 Hole Flange Female to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 50GHz**

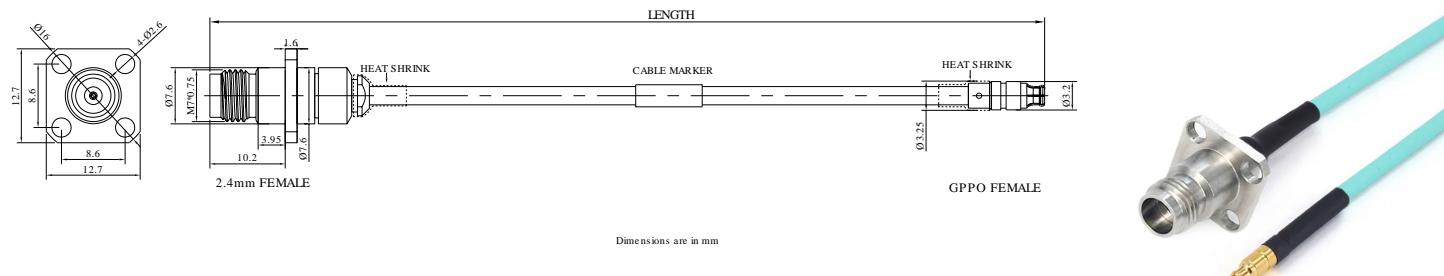


## Connectors Configuration

	Connector 1	Connector 2
Connector Series	2.4mm	GPPO(Mini-SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	4 Hole Flange	None
Connector Body Style	Straight	Straight
Connector Body Material	Stainless Steel	Beryllium Copper
Connector Body Plating	Passivated	Gold

## Cable Configuration

Cable Type	RG-405SS
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver Plated Copper Wire
Dielectric Material	PTFE
Number of Shields	2
Shield Layer 1 Material	Silver Plated Copper Tape
Shield Layer 2 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	2.64
Cable Color	Turquoise
Minimum Bend Radius (mm)	6
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	< -100dB @ 1GHz

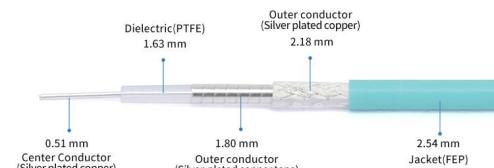

**P/N: GAF71-24FFGPPF-XXX**
**2.4mm 4 Hole Flange Female to GPPO(Mini-SMP) Female Cable Assembly | RG-405SS Flexible Coax Cable | DC - 50GHz**

### Electrical Data

#### Electrical Specifications for Different Length

Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
100	$\pm 3$	DC - 50GHz	10dB to 50GHz	1.32 to 40GHz
200	$\pm 3$			1.94 to 40GHz
300	$\pm 5$			2.56 to 40GHz
500	$\pm 5$			3.82 to 40GHz
800	$\pm 10$			5.66 to 40GHz
1000	$\pm 10$			6.9 to 40GHz
1500	$\pm 15$			10.0 to 40GHz
2000	$\pm 20$			13.5 to 40GHz

### Environmental Specifications

RoHS Compliant

Yes

Operating Temperature Range

-45°C to +125°C