


GPO (SMP) Female to GPO (SMP) Female Cable Using RG-405SS Flexible Coax, DC - 18GHz

P/N: FRF71-GPFGPF-XXX

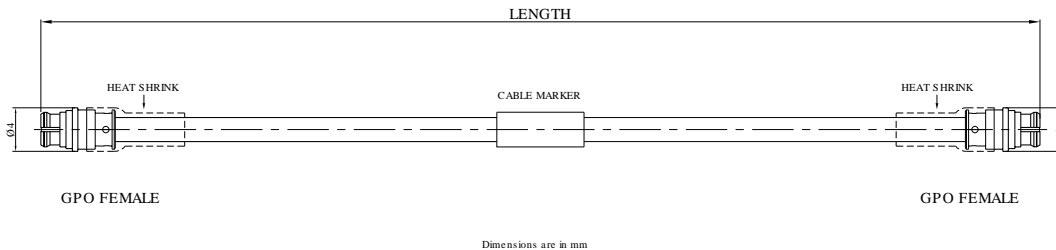

Product Configuration

Connector 1 Series	GPO(SMP)
Connector 1 Polarity	Standard
Connector 1 Gender	Female
Connector 1 Impedance (Ohm)	50
Connector 1 Mount Method	None
Connector 1 Body Style	Straight
Connector 2 Series	GPO(SMP)
Connector 2 Polarity	Standard
Connector 2 Gender	Female
Connector 2 Impedance (Ohm)	50
Connector 2 Mount Method	None
Connector 2 Body Style	Straight
Coax Cable	RG-405SS

Mechanical Data

Connector 1 Body Material	Beryllium Copper
Connector 1 Body Plating	Gold
Connector 2 Body Material	Beryllium Copper
Connector 2 Body Plating	Gold
Out Diameter	2.54mm
Min. Bending Radius	6.35mm
Mating Cycles, Min	≥500

GPO (SMP) Female to GPO (SMP) Female Cable Using RG-405SS Flexible Coax, DC - 18GHz


P/N: FRF71-GPFGPF-XXX

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

Cable Specifications

Description	Parameter
Center Conductor	Silver plated copper wire
Dielectric	PTFE
Inner Conductor	Silver-plated copper tape
Outer Conductor	Silver-plated copper braid
Jacket	FEP
Jacket Diameter(mm)	2.64
Capacitance(pF/m)	96.5
Velocity of propagation(%)	70
Min. bending radius(mm)	6
Shielding Effectiveness	> -100dB @ 1GHz

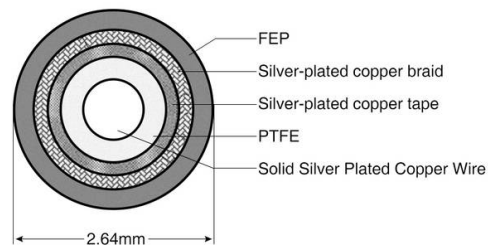

Part Number List

Part Number	Length(mm)	Frequency	Insertion Loss ≤(dB)				VSWR
			1GHz	5GHz	10GHz	18GHz	
FRF71-GPFGPF-1000	1000±10	DC-18GHz	0.86	1.70	2.50	3.60	≤ 12dB to 18GHz
FRF71-GPFGPF-800	800±5	DC-18GHz	0.73	1.40	2.06	2.94	≤ 12dB to 18GHz
FRF71-GPFGPF-500	500±5	DC-18GHz	0.53	0.95	1.42	2.05	≤ 12dB to 18GHz
FRF71-GPFGPF-300	300±3	DC-18GHz	0.39	0.65	0.96	1.44	≤ 12dB to 18GHz
FRF71-GPFGPF-260	260±3	DC-18GHz	0.37	0.59	0.87	1.31	≤ 12dB to 18GHz
FRF71-GPFGPF-200	200±3	DC-18GHz	0.33	0.51	0.74	1.12	≤ 12dB to 18GHz
FRF71-GPFGPF-100	100±3	DC-18GHz	0.24	0.35	0.52	0.81	≤ 12dB to 18GHz

Note: Phase Matching is available by request.