



GPO (SMP) Female to GPO (SMP) Female Cable Using RG-405SS P/N: FRF71-GPFGPF-XXX
Flexible Coax, DC - 18GHz

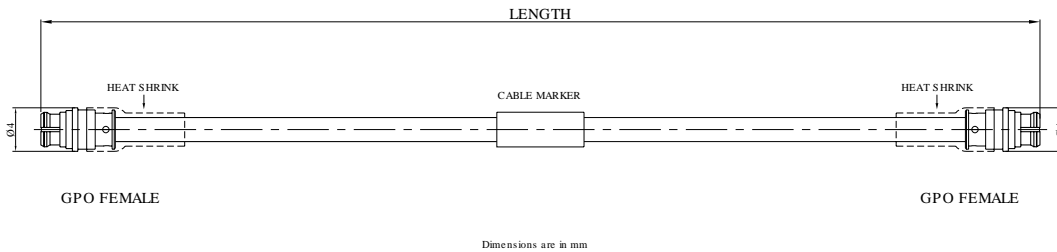

Connectors Configuration


	Connector 1	Connector 2
Connector Series	GPO(SMP)	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Beryllium Copper	Beryllium Copper
Connector Body Plating	Gold	Gold

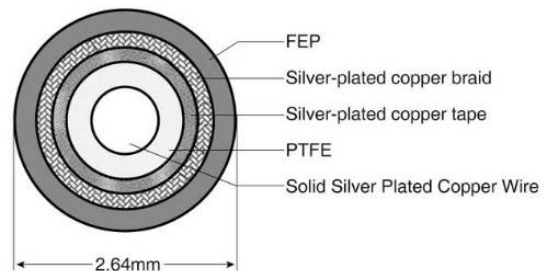

GPO (SMP) Female to GPO (SMP) Female Cable Using RG-405SS P/N: FRF71-GPFGPF-XXX Flexible Coax, DC - 18GHz

Electrical Data

Test Report for Cable assembly

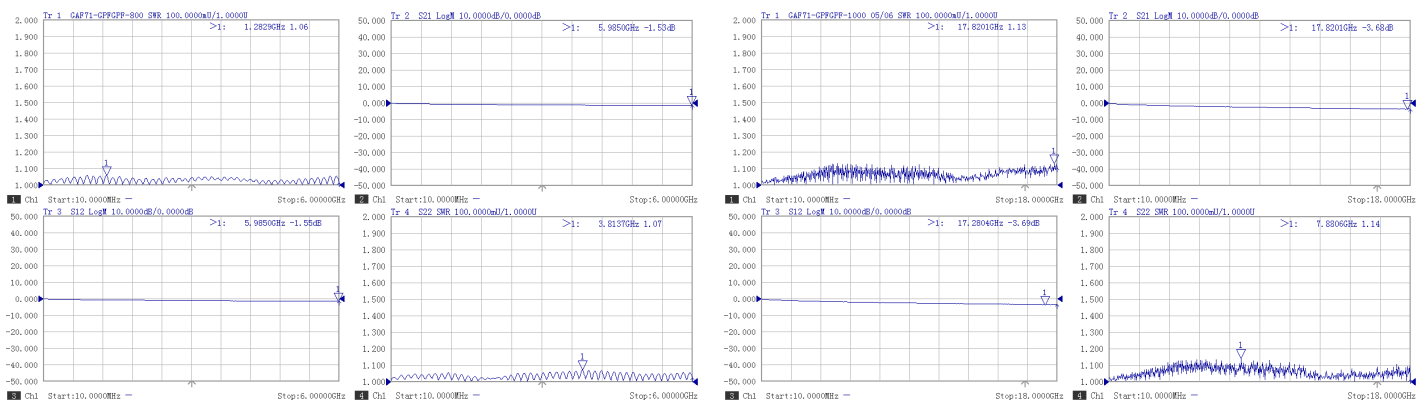

*Note: Test Cable Assembly Length = 800 mm

*Note: Test Cable Assembly Length = 1000 mm

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A