


GPO (SMP) Female Right Angle to GPO (SMP) Female Right Angle P/N: FRF71-GPWFGPWF-XXX
Cable Using RG-405SS Flexible Coax, DC - 18GHz

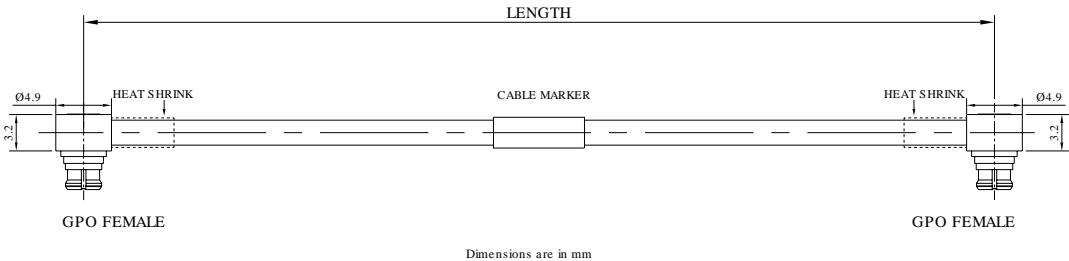


Connectors Configuration

	Connector 1	Connector 2
Connector Series	GPO(SMP)	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Beryllium Copper	Beryllium Copper
Connector Body Plating	Gold	Gold


GPO (SMP) Female Right Angle to GPO (SMP) Female Right Angle Cable Using RG-405SS Flexible Coax, DC - 18GHz

Electrical Data

Test Report for Cable assembly

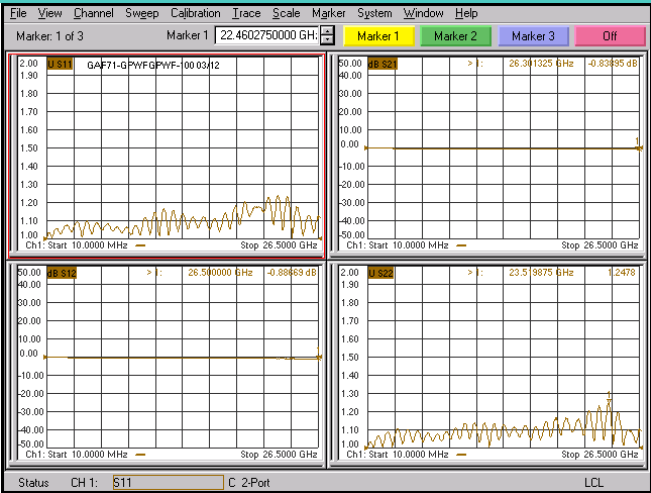

*Note: Test Cable Assembly Length = 100 mm

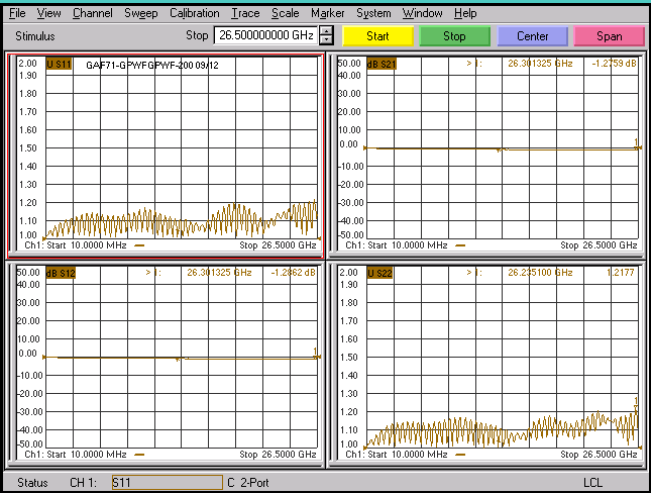

*Note: Test Cable Assembly Length = 200 mm

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A