


**GPO (SMP) Female Right Angle to GPO (SMP) Female Right Angle Cable Using RG-405SS Flexible Coax, DC - 18GHz** P/N: FRF71-GPWFGPWF-XXX

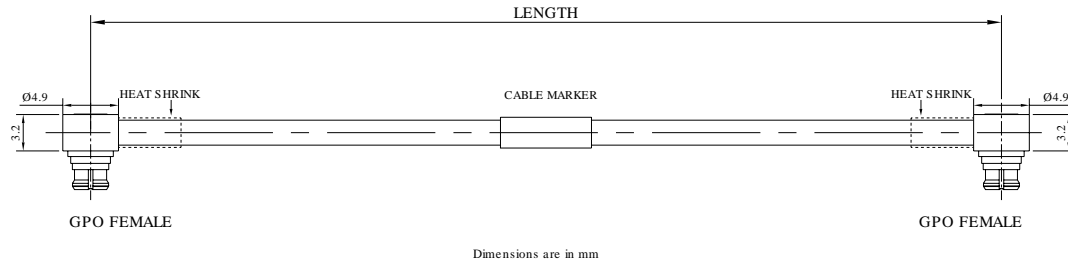

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	GPO(SMP)	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Right Angle	Right Angle
Connector Body Material	Beryllium Copper	Beryllium Copper
Connector Body Plating	Gold	Gold

GPO (SMP) Female Right Angle to GPO (SMP) Female Right Angle **P/N: FRF71-GPWFGPWF-XXX**  
Cable Using RG-405SS Flexible Coax, DC - 18GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A