


P/N: GAN9C-NMNM-XXX

N Male to N Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz

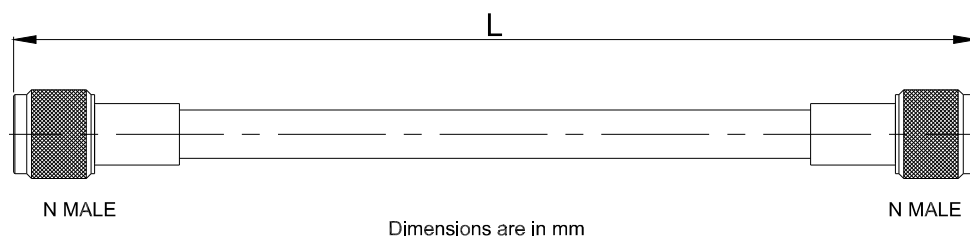

Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	N
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

Cable Configuration

Cable Type	LMR400
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper-clad aluminum wire
Dielectric Material	Foam PE
Number of Shields	2
Shield Layer 1 Material	Aluminum Tape
Shield Layer 2 Material	Tinned copper Braid
Jacket Material	PE
Cable Diameter (mm)	10.29
Cable Color	Black
Minimum Bend Radius (mm)	25.4mm
Capacitance (pF/m)	78.4
Velocity of Propagation	84%
Shielding Effectiveness	> -90dB @ 1GHz

P/N: GAN9C-NMNM-XXX

N Male to N Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 9GHz

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 3GHz	1.25 to 3GHz	0.25 to 3GHz
800	±10			0.30 to 3GHz
1000	±10			0.35 to 3GHz
1500	±15			0.43 to 3GHz
2000	±20			0.66 to 3GHz
3000	±30			0.92 to 3GHz
5000	±50			1.48 to 3GHz

Enviromental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C


MIL/STD

N/A

Test Report for Cable assembly

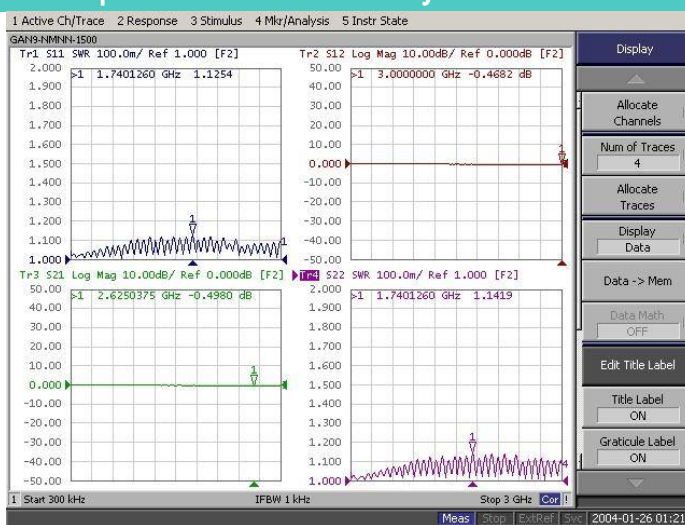

*Note: Test Cable Assembly Length = 1500 mm

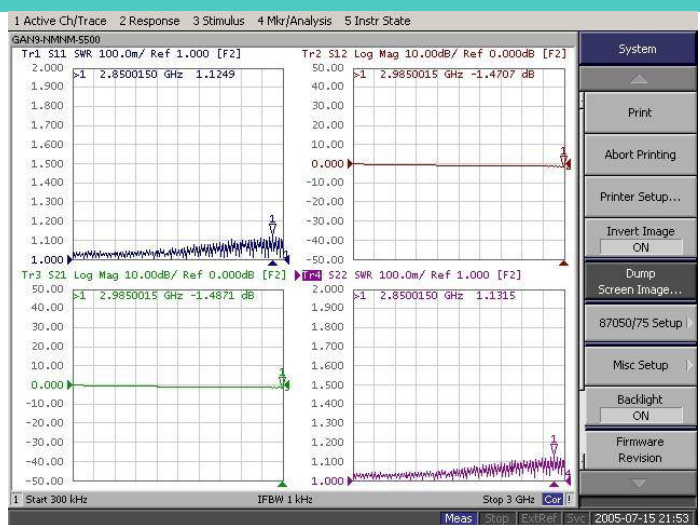

*Note: Test Cable Assembly Length = 5500 mm