


**P/N: GAR1-RPSMFRPSMF-XXX**

**Reverse Polarity SMA Female to Reverse Polarity SMA Female Cable Assembly | RG142 Flexible Coax Cable | DC-6GHz**

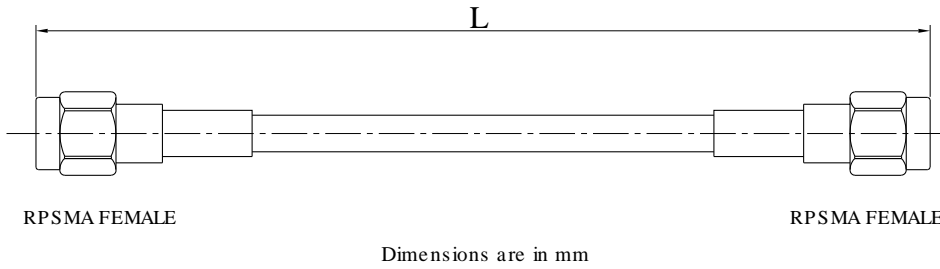


**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Reverse Polarity	Reverse Polarity
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**Cable Configuration**

Cable Type	RG142
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver-Coated Copper Clad Steel
Dielectric Material	PTFE (Polytetrafluoroethylene)
Number of Shields	1
Shield Layer 1 Material	Silver Plated Copper Braided Shield
Jacket Material	FEP
Cable Diameter (mm)	4.95
Cable Color	Brown
Minimum Bend Radius (mm)	25
Capacitance (pF/m)	94
Velocity of Propagation	70
Shielding Effectiveness	<-80dB @1GHz

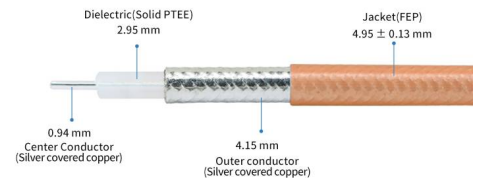

**P/N: GAR1-RPSMFRPSMF-XXX**

**Reverse Polarity SMA Female to Reverse Polarity SMA Female Cable Assembly | RG142 Flexible Coax Cable | DC-6GHz**

**Electrical Data**

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC-6GHz	1.35	0.9 dB
800	±10			1.30 dB
1000	±10			1.65 dB
1500	±15			2.40 dB
2000	±20			3.15 dB
3000	±30			4.65 dB

**Environmental Specifications**

RoHS Compliant

Yes

Operating Temperature Range

-55 °C to +125 °C