

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss \leq (dB)
100	± 3	DC - 6GHz	1.25 to 6GHz	0.38 to 6GHz
200	± 3			0.51 to 6GHz
300	± 5			0.64 to 6GHz
500	± 5			0.90 to 6GHz
1000	± 10			1.55 to 6GHz

Environmental Specifications


RoHS Compliant

Yes

Operating Temperature Range

-20°C to +70°C

Test Report for Cable assembly

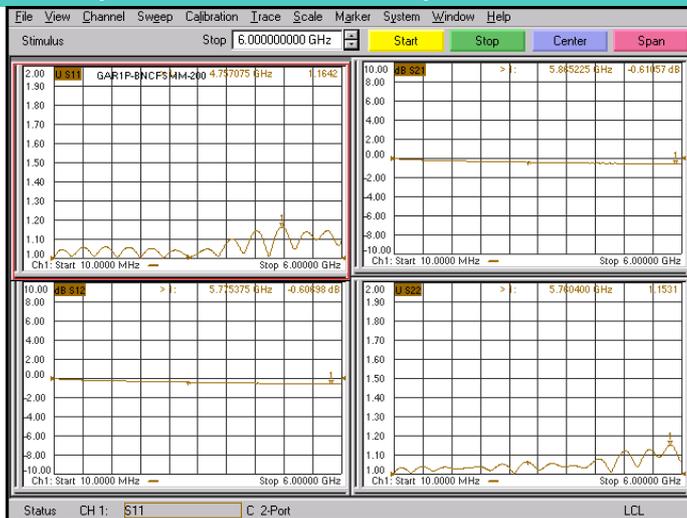

*Note: Test Cable Assembly Length = 200 mm

Revision History

Version	Description	Prepared By	Approved By	Date
---------	-------------	-------------	-------------	------