


BNC Male to BNC Male Cable Using RG223 Flexible Coax, DC - 3GHz

P/N: FRR2-BNCMBNCM-XXX

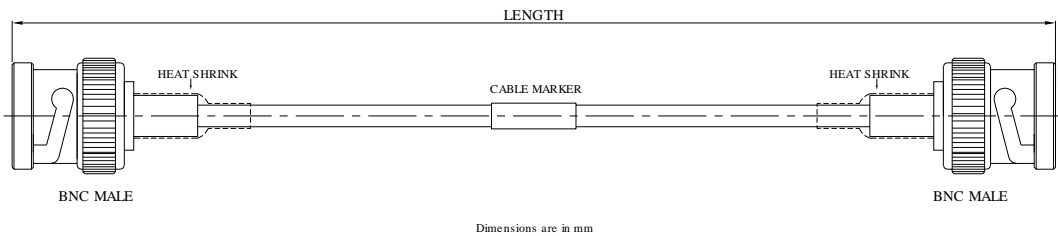

Connectors Configuration

	Connector 1	Connector 2
Connector Series	BNC	BNC
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

BNC Male to BNC Male Cable Using RG223 Flexible Coax, DC -
3GHz

P/N: [FRR2-BNCMBNCM-XXX](#)

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A