


BNC Male to SMA Male Cable Using RG223 Flexible Coax, DC - 3GHz

P/N: FRR2-BNCMSMM-XXX

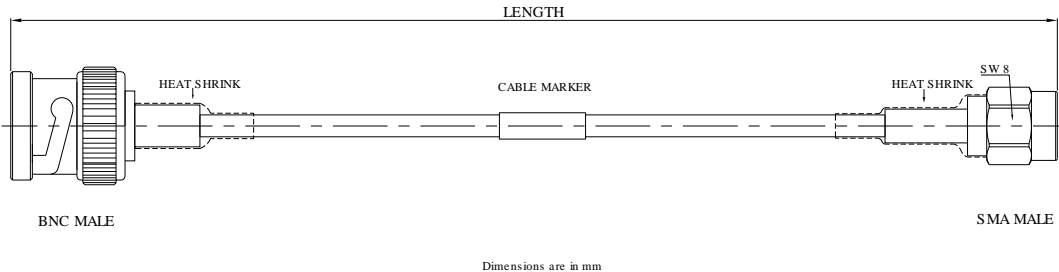


Connectors Configuration		
	Connector 1	Connector 2
Connector Series	BNC	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

BNC Male to SMA Male Cable Using RG223 Flexible Coax, DC - 3GHz


P/N: FRR2-BNCMSMM-XXX

Electrical Data

Test Report for Cable assembly

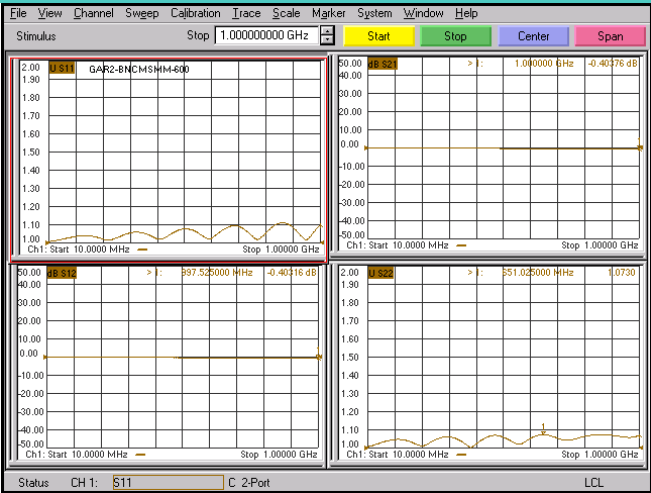

*Note:Test Cable Assembly Length = 600 mm

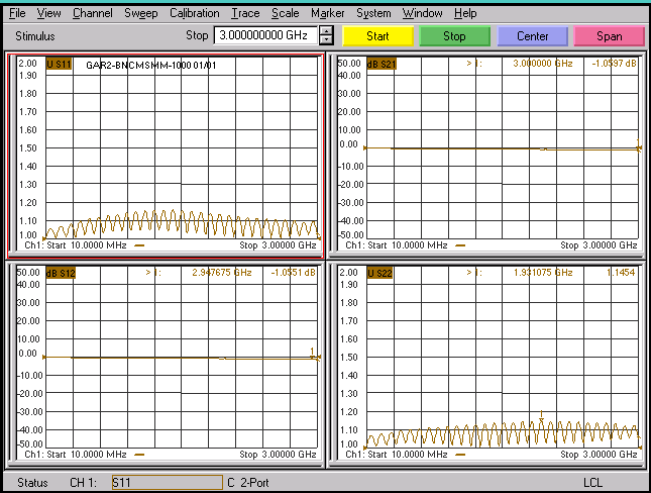

*Note:Test Cable Assembly Length = 1000 mm

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A