


P/N: GAR2-BNCMSMM-XXX

BNC Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

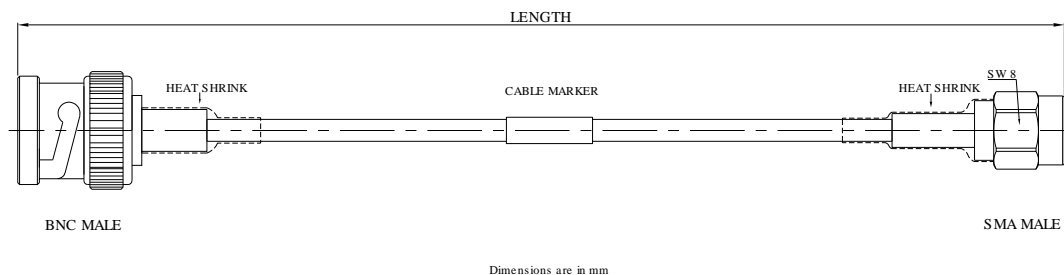


Connectors Configuration

	Connector 1	Connector 2
Connector Series	BNC	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

Cable Configuration

Cable Diameter (mm)	5.4
---------------------	-----

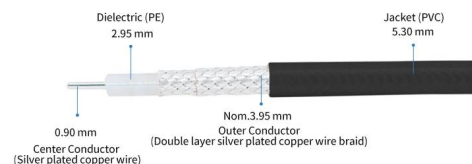

P/N: GAR2-BNCMSMM-XXX


BNC Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

Electrical Data


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A

Test Report for Cable assembly

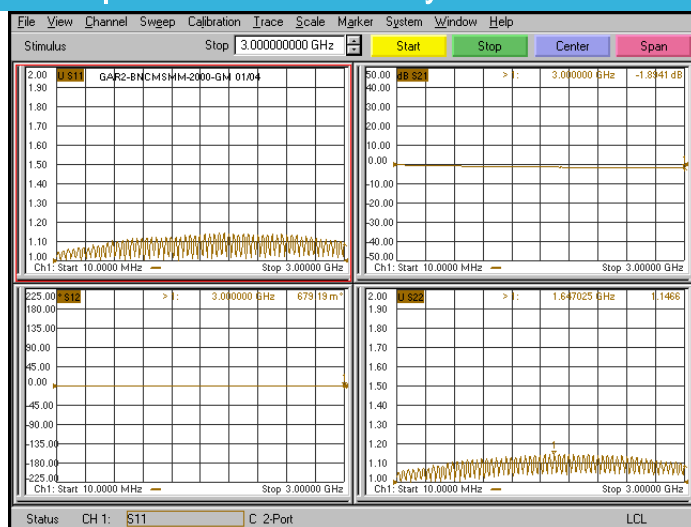

*Note: Test Cable Assembly Length = 2000 mm

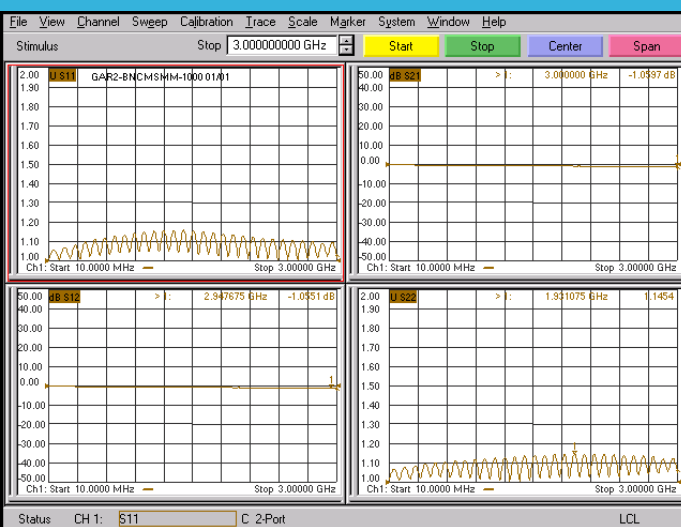

*Note: Test Cable Assembly Length = 1000 mm