
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAR2-NMBNCM-XXX

N Male to BNC Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz



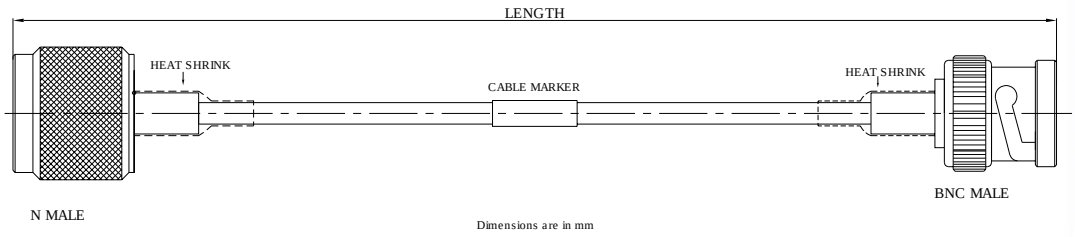


Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	BNC
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

Cable Configuration

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

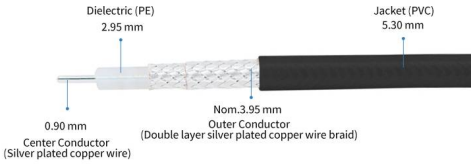

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com

P/N: GAR2-NMBNCM-XXX


N Male to BNC Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

Electrical Data


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 ºC to +80 ºC
MIL/STD	N/A

Test Report for Cable assembly

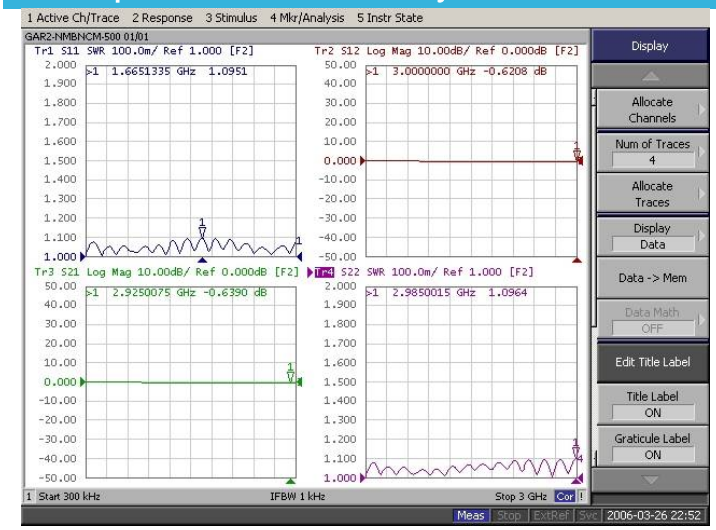

*Note:Test Cable Assembly Length = 500 mm

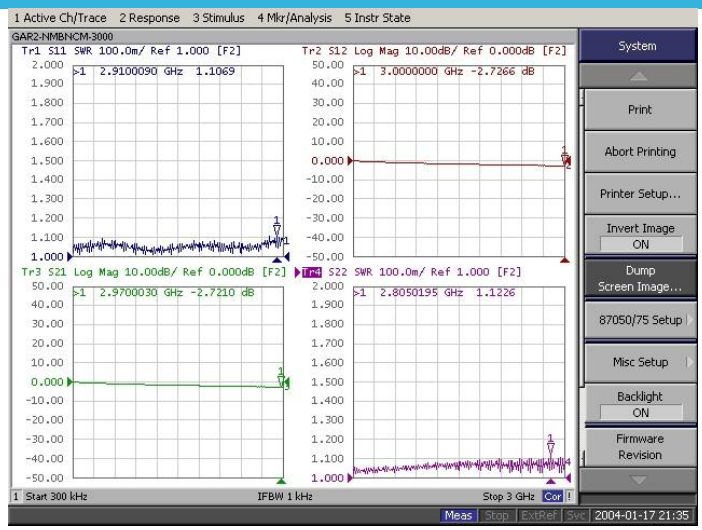

*Note:Test Cable Assembly Length = 3000 mm

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com