


P/N: GAR2-NMBNCM-XXX

N Male to BNC Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

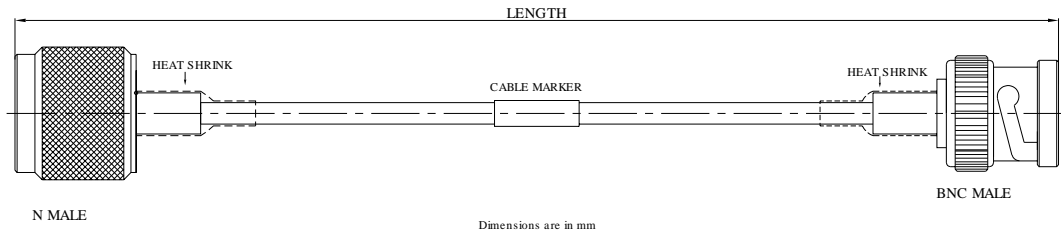


### Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	BNC
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

### Cable Configuration

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

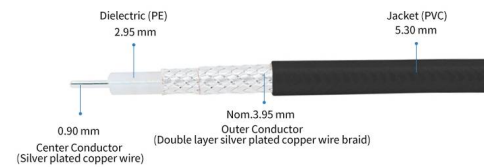

P/N: GAR2-NMBNCM-XXX

N Male to BNC Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

**Electrical Data**

**Environmental Specifications**


RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C

**Test Report for Cable assembly**

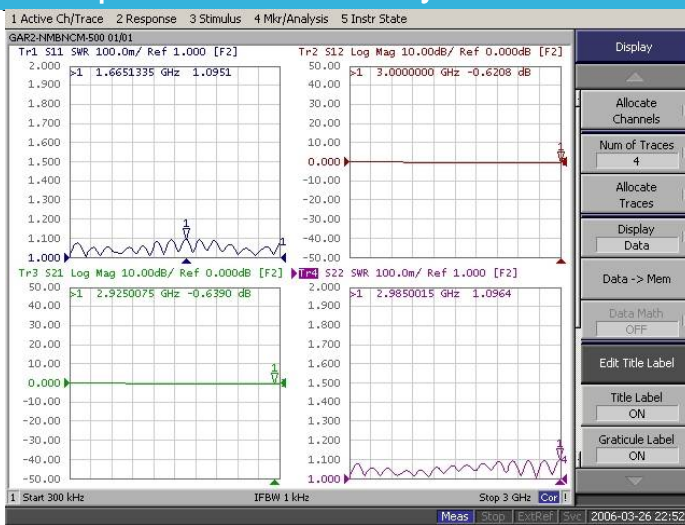

\*Note: Test Cable Assembly Length = 500 mm

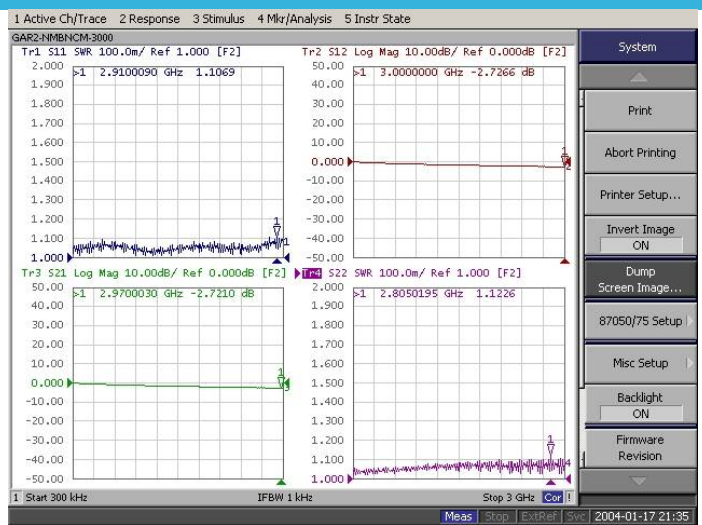

\*Note: Test Cable Assembly Length = 3000 mm