


P/N: GAR2-NMNM-XXX

N Male to N Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz

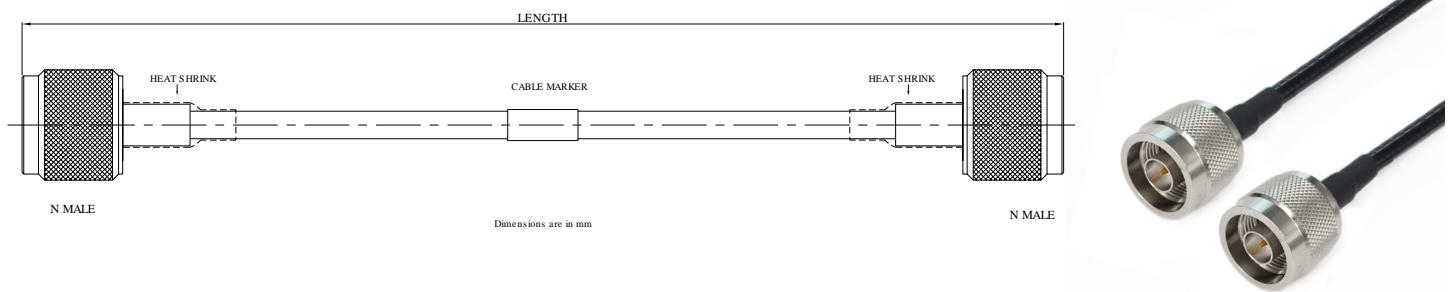


Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	N
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

Cable Configuration

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

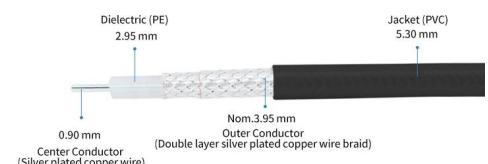

P/N: GAR2-NMNM-XXX

N Male to N Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz

Electrical Data

Environmental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C

MIL/STD

N/A

Test Report for Cable assembly

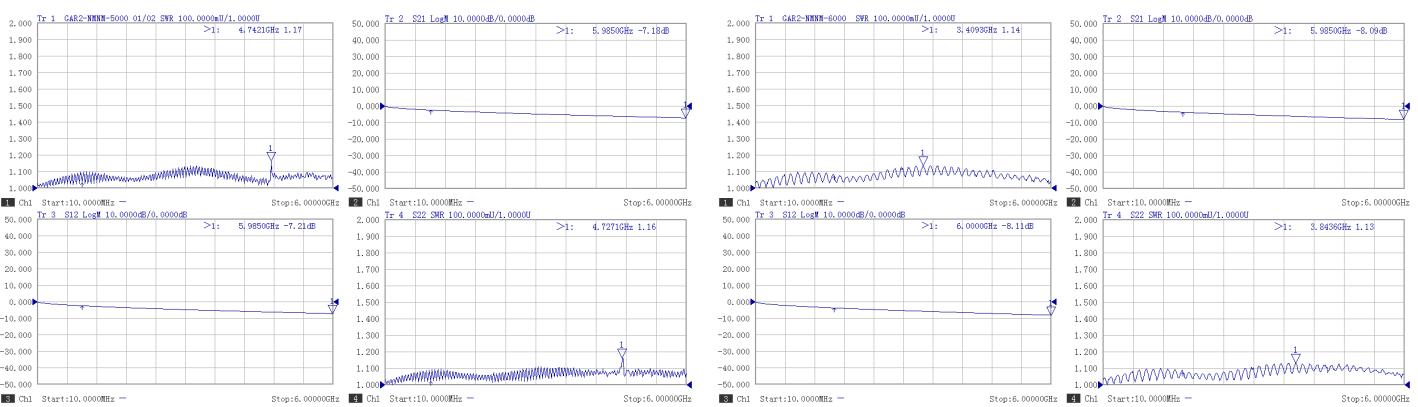

*Note: Test Cable Assembly Length = 5000 mm

*Note: Test Cable Assembly Length = 6000 mm