


P/N: FRR2-NMSMM-XXX

N Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz

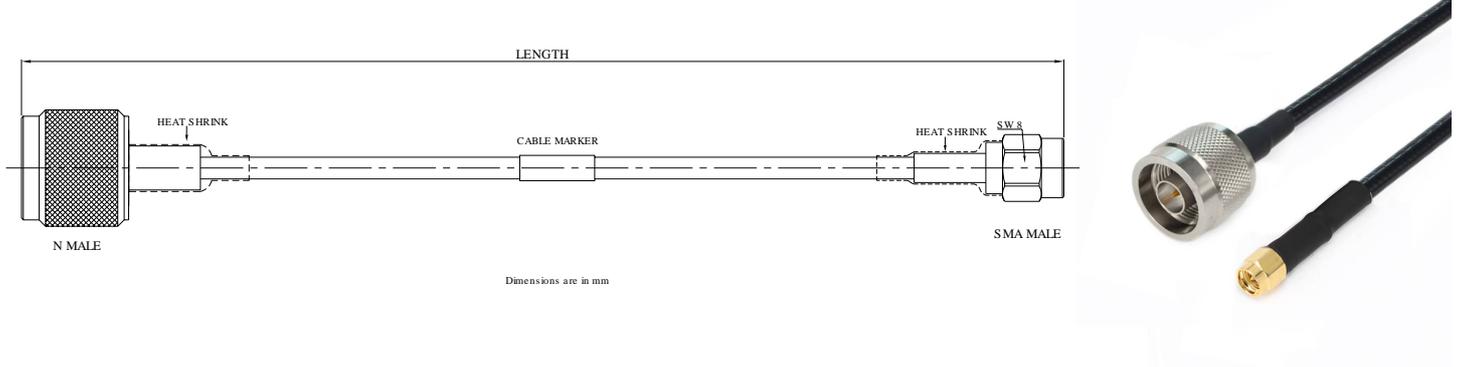


**Connectors Configuration**

	Connector 1	Connector 2
Connector Series	N	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

**Cable Configuration**

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

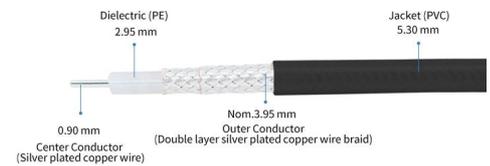

## Electrical Data

## Environmental Specifications


RoHS Compliant

Yes

Operating Temperature Range

-40 °C to +80 °C

## Test Report for Cable assembly

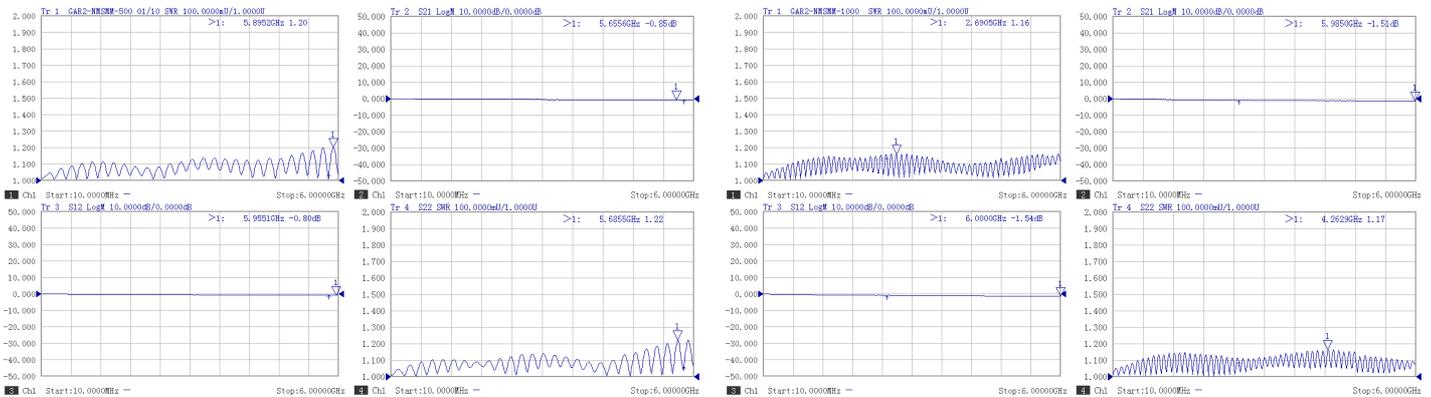

\*Note: Test Cable Assembly Length = 500 mm

\*Note: Test Cable Assembly Length = 1000 mm

## Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01