
Flexi RF
Reliable RF Components In Stock

Datasheet

P/N: FRR2-NMSMM-XXX

N Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz



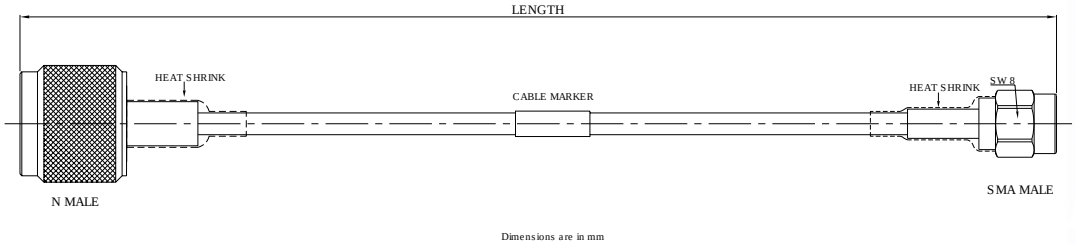


Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

Cable Configuration

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

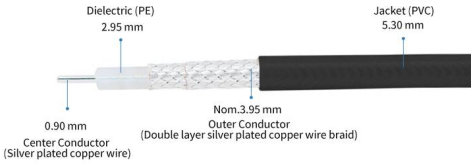

Flexi RF Inc


(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com

Electrical Data

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 ºC to +80 ºC
MIL/STD	N/A

Test Report for Cable assembly

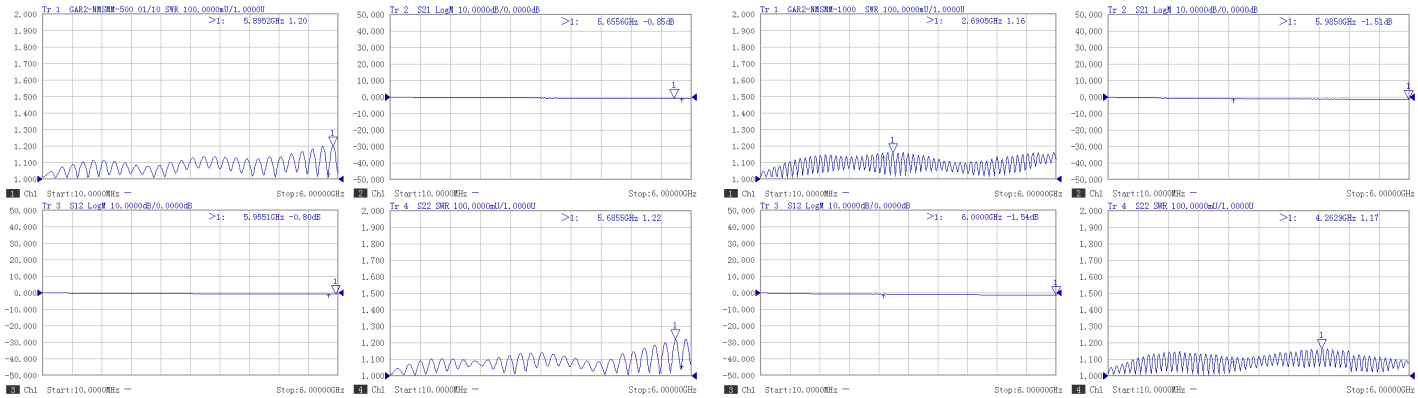

*Note:Test Cable Assembly Length = 500 mm

*Note:Test Cable Assembly Length = 1000 mm

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01