


P/N: GAR2-NMSMM-XXX

N Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz

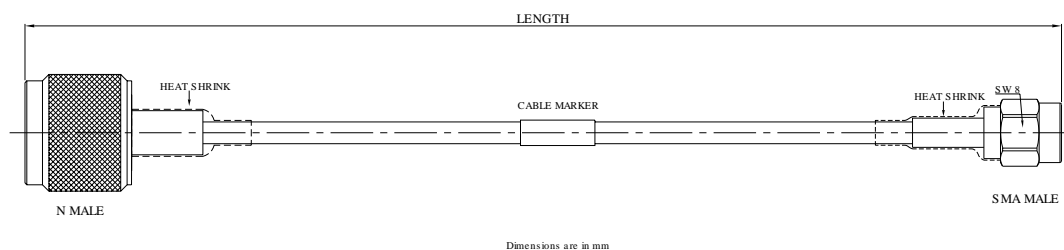


Connectors Configuration

	Connector 1	Connector 2
Connector Series	N	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Gold

Cable Configuration

Cable Type	RG223
Cable Impedance (Ohm)	50
Cable Diameter (mm)	5.4

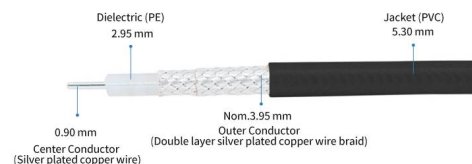

P/N: GAR2-NMSMM-XXX

N Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 6GHz

Electrical Data

Enviromental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C

MIL/STD

N/A

Test Report for Cable assembly

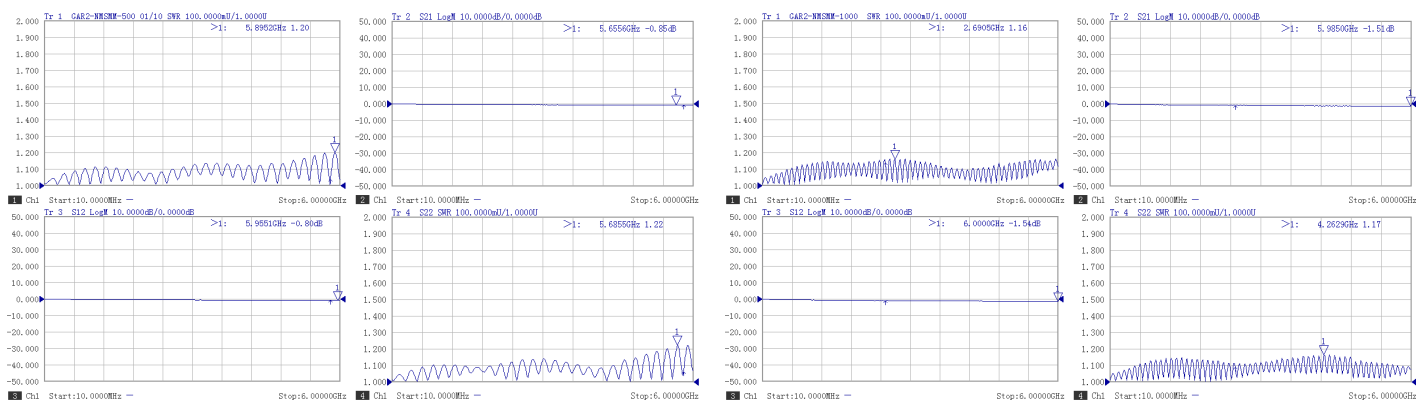

*Note: Test Cable Assembly Length = 500 mm

*Note: Test Cable Assembly Length = 1000 mm