


P/N: FRR2-SMMSMM-XXX

SMA Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

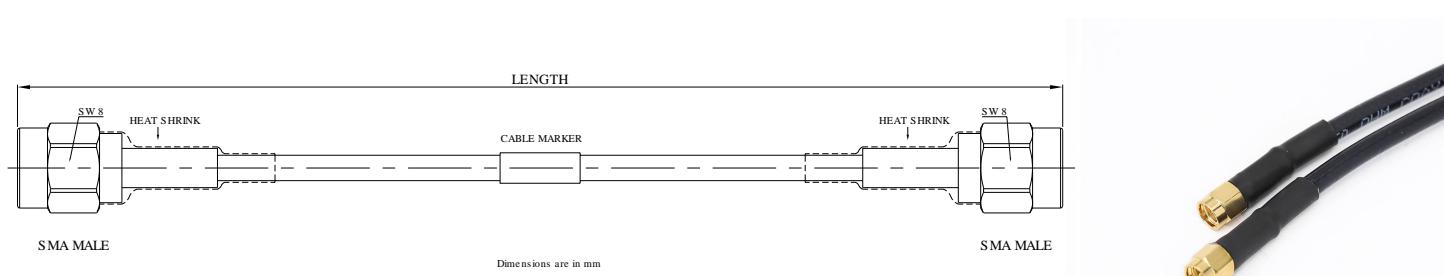


## Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

## Cable Configuration

Cable Diameter (mm) 5.4

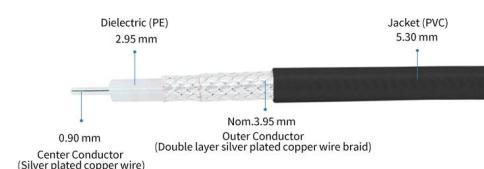



Reliable RF Components In Stock

Datasheet

P/N: FRR2-SMMSMM-XXX

SMA Male to SMA Male Cable Assembly | RG223 Flexible Coax Cable | DC - 3GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C


MIL/STD

N/A

## Test Report for Cable assembly

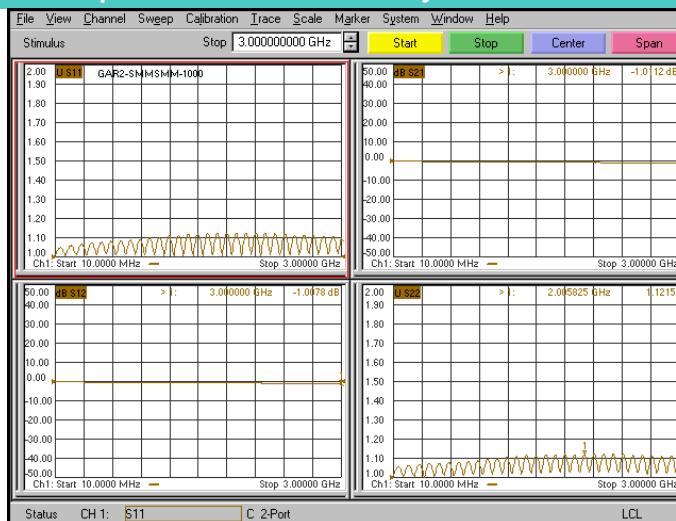

\*Note: Test Cable Assembly Length = 1000 mm

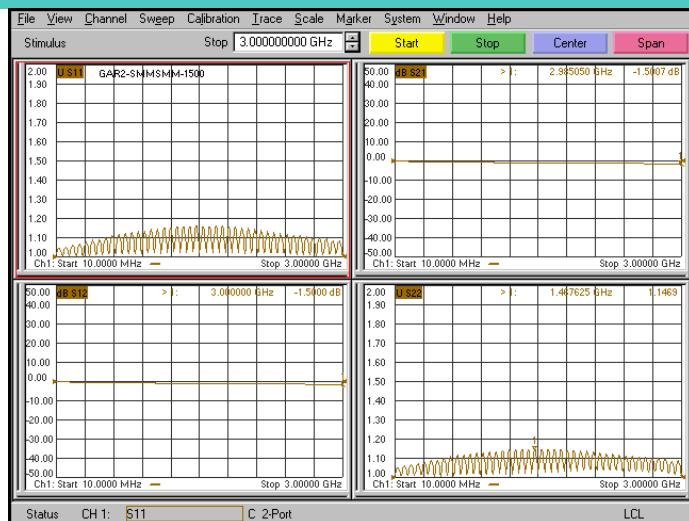

\*Note: Test Cable Assembly Length = 1500 mm

Flexi RF Inc

✉ (650)880-9199

✉ 20045 Stevens Creek Blvd., Suite 2B, Cupertino, CA 95014

✉ sales@flexirf.com

✉ www.flexirf.com

Page 2