


P/N: FRR3-SMMGPF-XXX

SMA Male to GPO(SMP) Female Cable Assembly | RG316 Series Flexible Coax Cable | DC - 3GHz



Dimensions are in mm

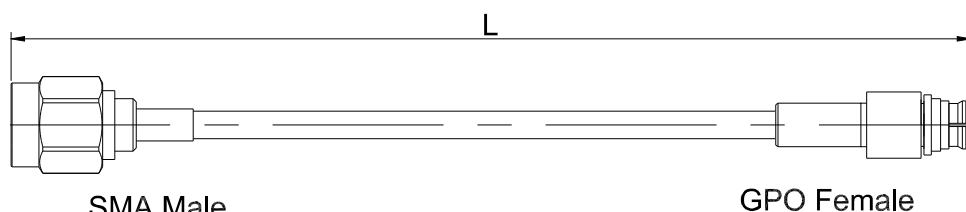


Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	GPO(SMP)
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Beryllium Copper
Connector Body Plating	Gold	Gold

Cable Configuration

Cable Diameter (mm)	2.56
---------------------	------

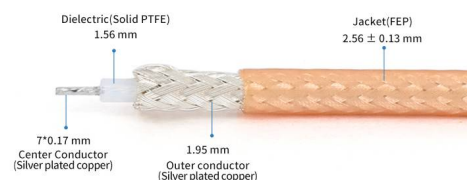

P/N: FRR3-SMMGPF-XXX


SMA Male to GPO(SMP) Female Cable Assembly | RG316 Series Flexible Coax Cable | DC - 3GHz

Electrical Data


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 °C to +165 °C
MIL/STD	N/A

Test Report for Cable assembly

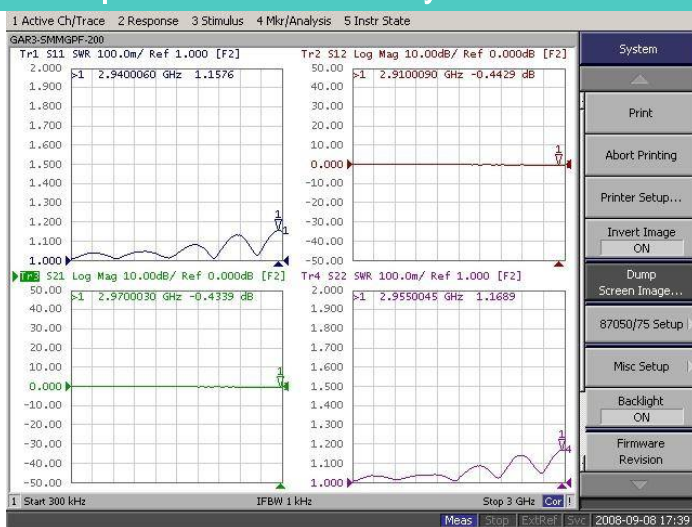

*Note: Test Cable Assembly Length = 200 mm

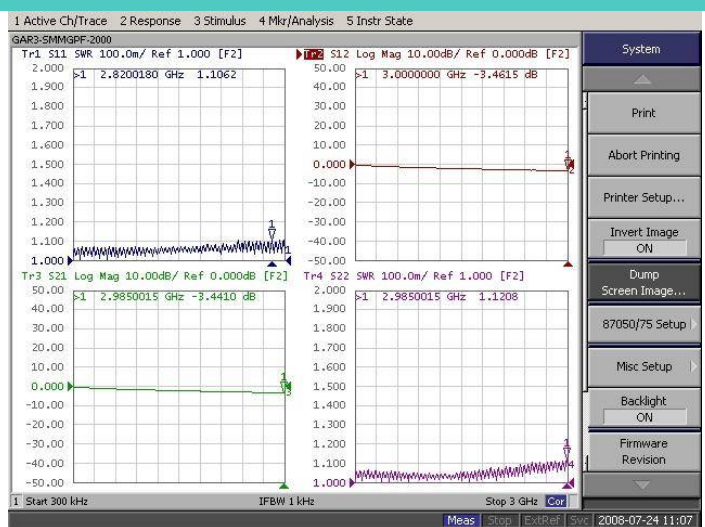

*Note: Test Cable Assembly Length = 2000 mm