


P/N: GAR3-SMMSMM-XXX

## SMA Male to SMA Male Cable Assembly | RG316 Series Flexible Coax Cable | DC - 3GHz

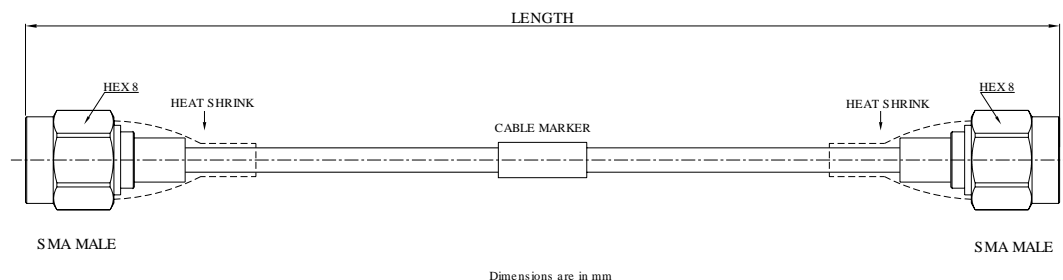


### Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

### Cable Configuration

Cable Type	RG316 Series
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver-plated copper-clad steel strand
Dielectric Material	PTFE
Number of Shields	1
Shield Layer 1 Material	Silver-plated copper braiding
Jacket Material	FEP
Cable Diameter (mm)	2.9
Cable Color	Brown
Minimum Bend Radius (mm)	15
Capacitance (pF/m)	94
Velocity of Propagation	70%
Shielding Effectiveness	> -80dB @ 1GHz

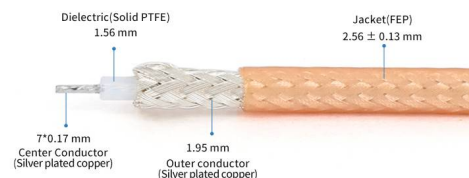

P/N: GAR3-SMMSMM-XXX

SMA Male to SMA Male Cable Assembly | RG316 Series Flexible Coax Cable | DC - 3GHz

## Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss $\leq$ (dB)
500	$\pm 5$	DC - 3GHz	1.25 to 3GHz	1.04 to 3GHz
800	$\pm 10$			1.40 to 3GHz
1000	$\pm 10$			1.75 to 3GHz
1500	$\pm 15$			2.55 to 3GHz
2000	$\pm 20$			3.25 to 3GHz
3000	$\pm 30$			4.80 to 3GHz
5000	$\pm 50$			7.85 to 3GHz

## Enviromental Specifications

RoHS Compliant

Yes


Operating Temperature Range

-40 °C to +80 °C


MIL/STD

N/A

## Test Report for Cable assembly

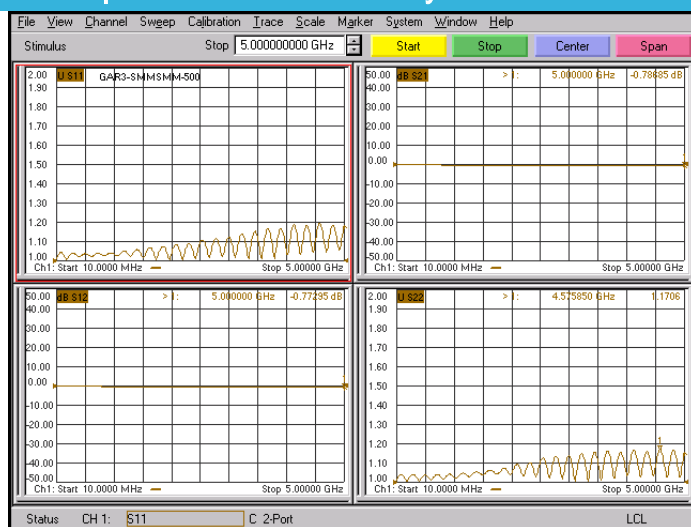

\*Note: Test Cable Assembly Length = 500 mm

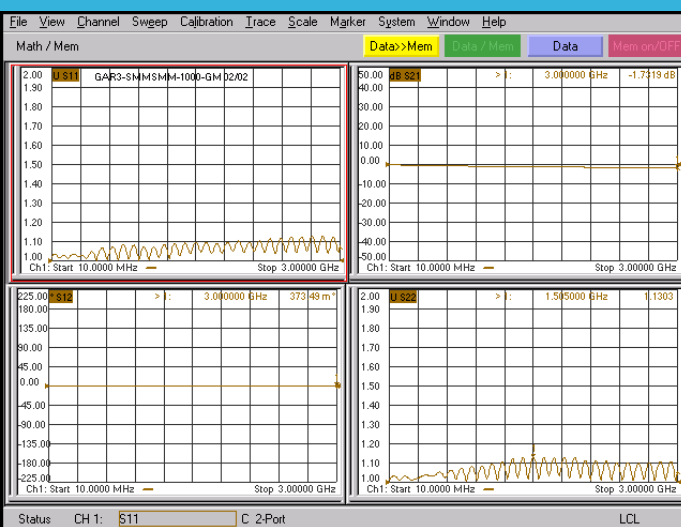

\*Note: Test Cable Assembly Length = 1000 mm