


SMA Female with 4 Hole Flange to MMCX Male Cable Using RG178 P/N: FRR8-SMFFMMCXM-XXX
Flexible Coax, DC - 3GHz

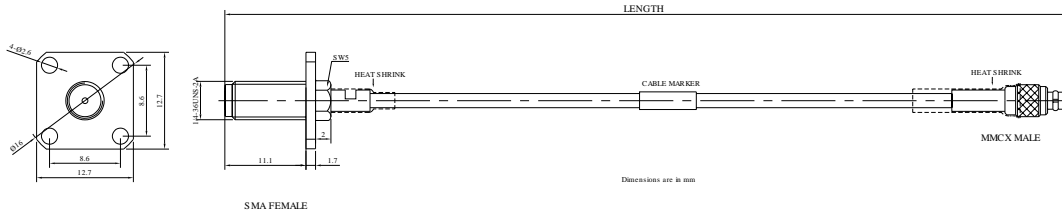

Connectors Configuration

| | Connector 1 | Connector 2 |
|---------------------------|---------------|-------------|
| Connector Series | SMA | MMCX |
| Connector Polarity | Standard | Standard |
| Connector Gender | Female | Male |
| Connector Impedance (Ohm) | 50 | 50 |
| Connector Mount Method | 4 Hole Flange | None |
| Connector Body Style | Straight | Straight |
| Connector Body Material | Brass | Brass |
| Connector Body Plating | Gold | Gold |

SMA Female with 4 Hole Flange to MMCX Male Cable Using RG178 P/N: [FRR8-SMFFMMCXM-XXX](#)
Flexible Coax, DC - 3GHz

Electrical Data

Environmental Specifications

| | |
|-----------------------------|------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -40 °C to +80 °C |
| MIL/STD | N/A |