


**SMA Female with 4 Hole Flange to MMCX Male Right Angle Cable** P/N: **FRR8-SMFFMMCXWM-XXX**  
**Using RG178 Flexible Coax, DC - 3GHz**

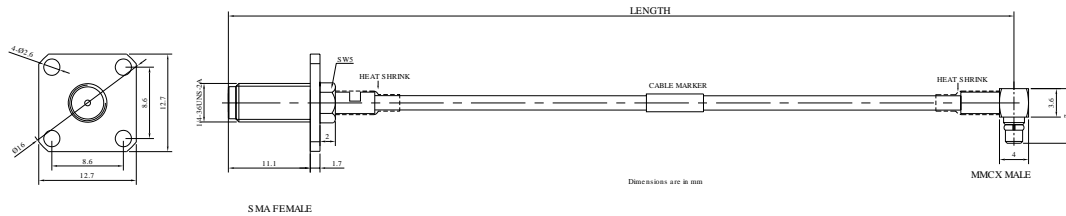

## Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	4 Hole Flange	None
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**SMA Female with 4 Hole Flange to MMCX Male Right Angle Cable** P/N: **FRR8-SMFFMMCXWM-XXX**  
Using RG178 Flexible Coax, DC - 3GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A