
Flexi RF

Reliable RF Components In Stock

Datasheet

P/N: FRR8-SMFFMMCXWM-XXX

SMA 4 Hole Flange Female to MMCX Right Angle Male Cable Assembly | RG178 Flexible Coax Cable | DC - 3GHz

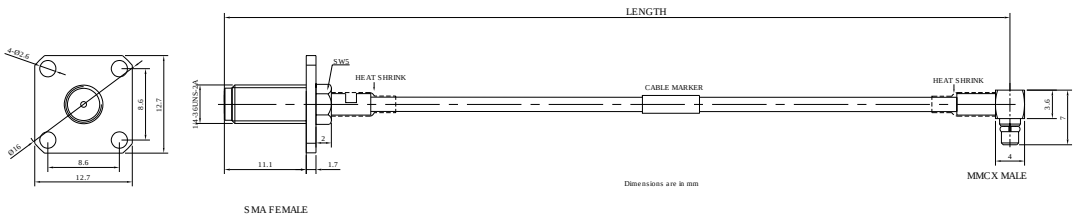




Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	4 Hole Flange	None
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

Cable Configuration

Cable Type	RG178
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper Clad Steel, Silver,7 Strands
Dielectric Material	PTFE
Number of Shields	1
Shield Layer 1 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	1.83
Cable Color	tan
Minimum Bend Radius (mm)	10.16
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	>-70dB@1GHz

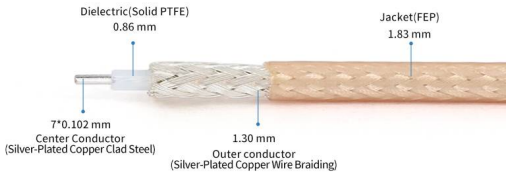

Flexi RF Inc

(650)880-9199

20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014

sales@flexirf.com

www.flexirf.com


Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 6GHz	1.25 to 3GHz	1.75 to 3GHz
800	±5			2.44 to 3GHz
1000	±10			2.95 to 3GHz
1500	±15			4.15 to 3GHz
2000	±20			5.35 to 3GHz
3000	±30			7.65 to 3GHz
5000	±50			12.25 to 3GHz


Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 ºC to +80 ºC
MIL/STD	N/A

Test Report for Cable assembly

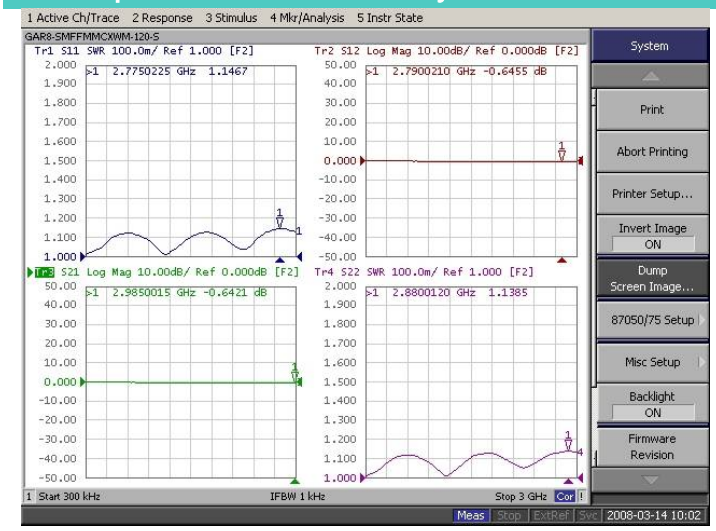

*Note:Test Cable Assembly Length = 120 mm

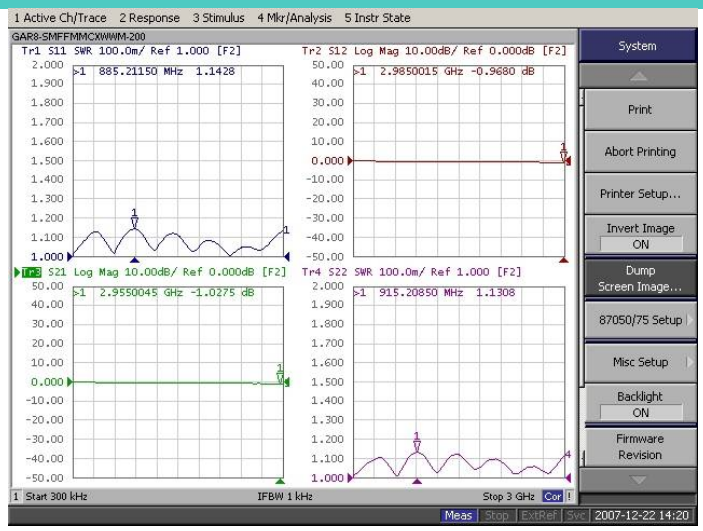

*Note:Test Cable Assembly Length = 200 mm

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01