


SMA Female with 4 Hole Flange to SSMB Female Cable Using RG178 Flexible Coax, DC - 3GHz

P/N: FRR8-SMFFSSMBF-XXX

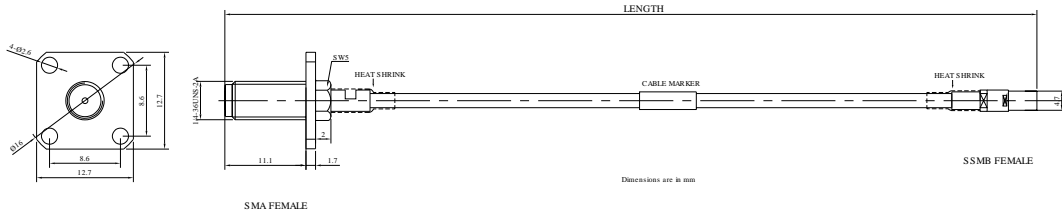

Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SSMB
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	4 Hole Flange	None
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

SMA Female with 4 Hole Flange to SSMB Female Cable Using
RG178 Flexible Coax, DC - 3GHz

P/N: [FRR8-SMFFSSMBF-XXX](#)

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A