


SMA Male to MMCX Male Right Angle Cable Using RG178 Flexible Coax, DC - 3GHz P/N: **FRR8-SMMMMCXWM-XXX**

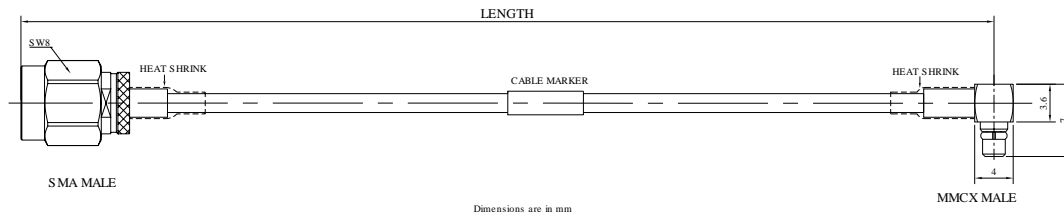

Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

SMA Male to MMCX Male Right Angle Cable Using RG178 Flexible Coax, DC - 3GHz **P/N: FRR8-SMMMMCXWM-XXX**

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A