


## SMA Male to SMA Female Bulkhead Mount Cable Using RG178 Flexible Coax, DC - 6GHz

P/N: FRR8-SMMSMYF-XXX

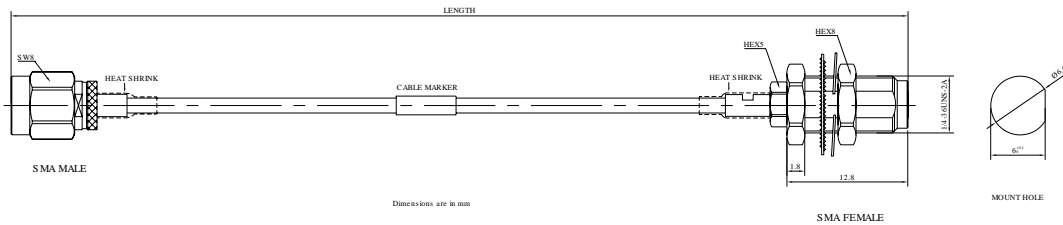

### Connectors Configuration

	Connector 1	Connector 2
Connector Series	MCX	SMA
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	Bulkhead
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**SMA Male to SMA Female Bulkhead Mount Cable Using RG178  
Flexible Coax, DC - 6GHz**

**P/N: FRR8-SMMSMYF-XXX**

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A