


SMA Male to SSMB Female Right Angle Cable Using RG178 Flexible Coax, DC - 3GHz

P/N: FRR8-SMMSSMBWF-XXX

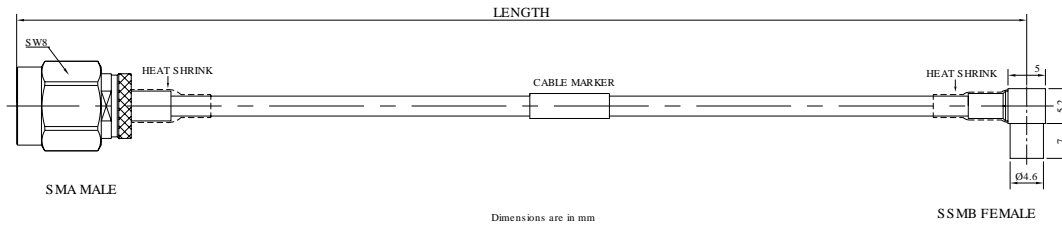

Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SSMB
Connector Polarity	Standard	Standard
Connector Gender	Male	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	None	None
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**SMA Male to SSMB Female Right Angle Cable Using RG178
Flexible Coax, DC - 3GHz**

P/N: FRR8-SMMSSMBWF-XXX

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A