


SMA Female Bulkhead Mount to MMCX Male Cable Using RG178 P/N: FRR8-SMYFMMCXM-XXX
Flexible Coax, DC - 3GHz

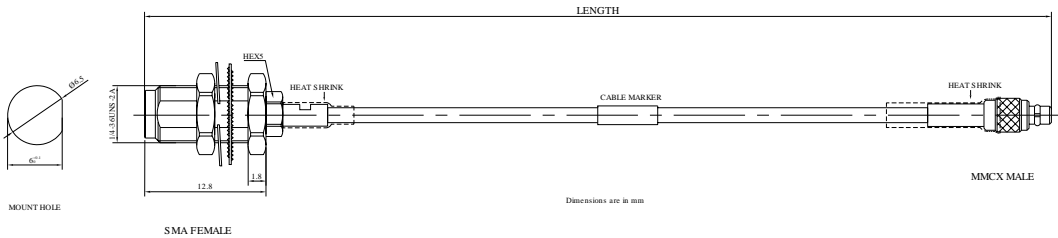

Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	Bulkhead	None
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

**SMA Female Bulkhead Mount to MMCX Male Cable Using RG178
Flexible Coax, DC - 3GHz**

P/N: FRR8-SMYFMMCXM-XXX

Electrical Data

Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A