


P/N: GAR8-SMYFMMCXWM-XXX

SMA Bulkhead Female to MMCX Right Angle Male Cable Assembly | RG178 Flexible Coax Cable | DC - 3GHz

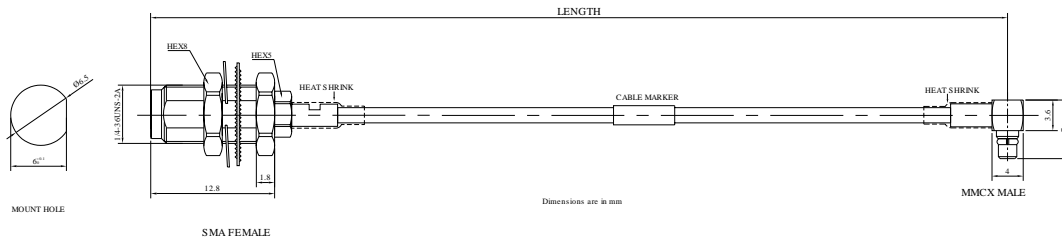


Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	MMCX
Connector Polarity	Standard	Standard
Connector Gender	Female	Male
Connector Impedance (Ohm)	50	50
Connector Mount Method	Bulkhead	None
Connector Body Style	Straight	Right Angle
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

Cable Configuration

Cable Type	RG178
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper Clad Steel, Silver, 7 Strands
Dielectric Material	PTFE
Number of Shields	1
Shield Layer 1 Material	Silver Plated Copper Braid
Jacket Material	FEP
Cable Diameter (mm)	1.83
Cable Color	tan
Minimum Bend Radius (mm)	10.16
Capacitance (pF/m)	96.5
Velocity of Propagation	70%
Shielding Effectiveness	>-70dB@1GHz

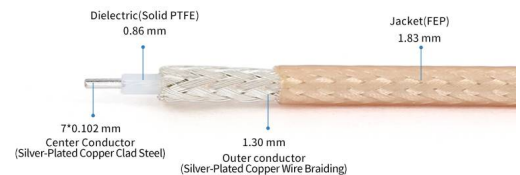

P/N: GAR8-SMYFMMCXWM-XXX

SMA Bulkhead Female to MMCX Right Angle Male Cable Assembly | RG178 Flexible Coax Cable | DC - 3GHz

Electrical Data

Electrical Specifications for Different Length					
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)	
100	±3	DC - 6GHz	1.25 to 3GHz		
150	±3				
200	±3				
250	±3				
300	±5				
400	±5				
500	±5				1.75 to 3GHz
800	±10				2.44 to 3GHz
1000	±10				2.95 to 3GHz
1500	±15				4.15 to 3GHz
2000	±20				5.35 to 3GHz

Environmental Specifications

RoHS Compliant	Yes			1.25 to 3GHz
----------------	-----	--	--	--------------

Yes

Operating Temperature Range

-40 °C to +80 °C

MIL/STD

N/A