


## SMA Female Bulkhead Mount to SSMB Female Cable Using RG178 P/N: FRR8-SMYFSSMBF-XXX Flexible Coax, DC - 3GHz

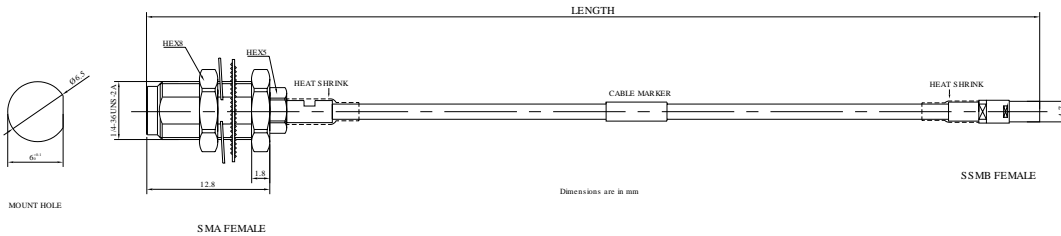

### Connectors Configuration

	Connector 1	Connector 2
Connector Series	SMA	SSMB
Connector Polarity	Standard	Standard
Connector Gender	Female	Female
Connector Impedance (Ohm)	50	50
Connector Mount Method	Bulkhead	None
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Gold	Gold

SMA Female Bulkhead Mount to SSMB Female Cable Using RG178 P/N: [FRR8-SMYFSSMBF-XXX](#)  
Flexible Coax, DC - 3GHz

## Electrical Data

## Environmental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40 °C to +80 °C
MIL/STD	N/A